

2025-26

Air Brake Manual





Contents

1. Requirements for A Endorsement	1
2. Brakes and braking	2
Heat – energy – traction – friction	2
Speed – weight – distance	3
How power is obtained	4
A. Mechanically	4
B. Use of air	4
C. Leverage and air pressure	5
Stopping distance	6
Reaction time	6
Brake lag	6
Braking distance	6
3. Basic system components	8
Compressor	8
Reservoirs	9
Foot valve (application or treadle valve)	9
Service-brake chambers (brake pots)	10
Brake shoes and drums	10
Disc brakes (rotors and pads)	11
4. Basic system operation	12
Basic air brake system	12
Additions to the basic system	13
Reservoir	13
Safety valve	14
One-way check valve	14
Air pressure gauge	14
Air governor	15
Relay valve	15
Low air warning switch	16
Stop light switch	16
Quick-release valve	16
Front axle ratio valve	17
Air dryer	17

5. Dual air systems	19
Dual-circuit air system	21
Spring-brake chambers (emergency/park brake).	24
Service-brake chamber.	24
Parking-brake system	24
Dual-circuit system with spring parking brakes	27
Two-way check valve	28
Spring brakes with modulator valve.	28
6. Tractor system/trailer towing system	31
Tractor protection system	31
Trailer-supply valve	31
Manually-operated trailer-supply valves.	32
Charging the trailer system.	32
Trailer breakaway.	32
Tractor protection valve	32
Trailer hand-control valve	33
Two-way check valve	34
Gladhands.	34
Bobtail proportioning relay valve	35
Simple tractor-trailer system.	35
Brake application – foot valve.	38
Brake application – hand valve.	40
Emergency applications	42
Service-line rupture.	44
Supply-line rupture	46
Loss of supply reservoir air.	48
Spring-brake trailer system	50
7. Checking and adjusting cam-type brakes	52
Within an inch of your life.	52
Checking	53
Brake adjustment	54
Automatic or self-adjusting slack adjusters	54
Manual slack adjuster check – preferred method	55
Brake adjustment	55
Service tests.	55
Stroke vs. force.	56
Steep downgrade.	57
Pre-trip procedure for air single unit	58
Pre-trip procedure for air combination unit	60

8. Glossary.....	63
9. Air brake manual summary.....	66
10. Conversion charts.....	68
11. Answer key.....	69
Section 2 summary.....	69
Section 3 and 4 summary.....	70
Section 5 summary.....	71
Section 6 summary.....	72
Section 7 summary.....	74
Section 9 summary.....	74



1. Requirements for A Endorsement

If you want to operate a vehicle with an air brake system you'll need an Endorsement A on your licence. The Endorsement A is not required when operating Class 3 or 5 vehicles licensed as a farm truck, or trucks with air over hydraulic brakes. You may also operate a vehicle equipped with air brakes as a learner while accompanied by a person who has an Endorsement A on their licence, provided your licence permits you to operate that type of vehicle under normal conditions.

To qualify for an Endorsement A you must:

- Pass a written air brake knowledge test.
- Complete a practical demonstration, without any assistance and without using a checklist, on air brake equipment that you provide.

When you're ready to book your written air brake knowledge test or practical air brake demonstration you can call 1-844-TLK-2SGI (1-844-855-2744), press two at the prompt or request the exam office, have them book it and pay for it then by credit card. Your written air brake knowledge test can also be scheduled online and paid for at MySGI (sgi.sk.ca/mysgi).

2. Brakes and braking

Heat – energy – traction – friction

To move a vehicle, an internal combustion engine must convert its heat energy to mechanical energy. This mechanical energy goes from the engine to the driving wheel tires by means of a system of connecting rods, shafts and gears. The final factor that moves a vehicle is the amount of traction its tires have on the road surface.

Traction is the ability of a tire to grip the road surface it rolls on. The vehicle's acceleration rate depends on the power the engine develops and the amount of traction the tires have on the road surface.

Friction is the force which resists movement between two surfaces in contact with each other. To stop a vehicle, brake shoe linings are forced against the machined surfaces of the brake drums, creating friction. This friction produces heat.

The engine converts the energy of heat into the energy of motion – the brakes must convert this energy of motion back into the energy of heat. Friction between brake drums and linings generates heat, while reducing the mechanical energy of the revolving brake drums and wheels. The heat produced is absorbed by the metal brake drums, which dissipate heat by passing it off into the atmosphere. The amount of heat the brake drums can absorb depends on the metal thickness of which they are made. When enough friction is created between brake linings and drums, the wheels stop turning. The final factor that stops a vehicle is not the brakes, but the traction between tires and road surface.

If a 200 horsepower engine accelerates a vehicle to 100 km/h in one minute, imagine the power needed to stop this same vehicle. Not only that, the vehicle might have to be stopped in an emergency, in as little as six seconds (just 1/10 of the time it took to reach 100 km/h).

100 Horsepower



100 Horsepower



Figure 1. Horsepower

To stop a vehicle in 1/10 the time it takes to accelerate requires stopping power of 10 times the acceleration power – equivalent to 2,000 horsepower.

If the vehicle had six wheels, each wheel would have to provide 1/6 of the braking power. If one or two wheels had brakes that were not properly adjusted, the other wheels would have to do more than their share of the braking, and that might be more than their brakes were constructed to stand. Excessive use of the brakes would then result in a build-up of heat greater than the brake drums could absorb and dissipate. Too much heat would result in brake damage and possible failure.

Most brake linings operate best around 120°C and should not exceed 250°C (Fig. 2). It's important to understand that the power needed to stop generates heat which could ruin the brakes.

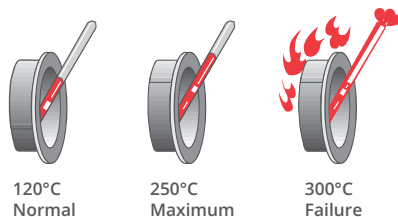


Figure 2. Brake lining temperature

Speed – weight – distance

The distance required to stop a vehicle depends on its speed and weight in addition to the factors of energy, heat and friction. The brake power required to stop a vehicle varies directly with its weight and the “square” of its speed. For example, if weight is doubled, stopping power must be doubled to stop in the same distance. If speed is doubled, stopping power must be increased four times to stop in the same distance. When weight and speed are both doubled, stopping power must be increased eight times to stop in the same distance.

Example: A vehicle carrying a load of 14,000 kg down a grade at 16 km/h is brought to a stop in a distance of 30 metres by normal brake application. If the same vehicle carried 28,000 kg down the same grade at 32 km/h, it would require eight times the braking power to stop the vehicle in 30 metres. This would be more braking power than the brakes could provide. No vehicle has enough braking power when it exceeds its limitations.

How power is obtained

A. Mechanically

Braking systems use devices to gain a mechanical advantage. The most common device for this purpose is leverage (Fig. 3).

A lever is placed on a pivot called the fulcrum. If the distance from A to C is four metres, and from C to B one metre, the ratio is four to one (4:1). Power is multiplied by the leverage principle. If a 100 kg downward force is applied at point A, then upward force at point B is 400 kg. This is the result of the mechanical advantage of leverage.

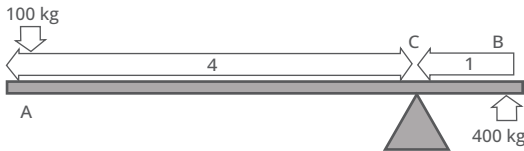


Figure 3. Simple lever

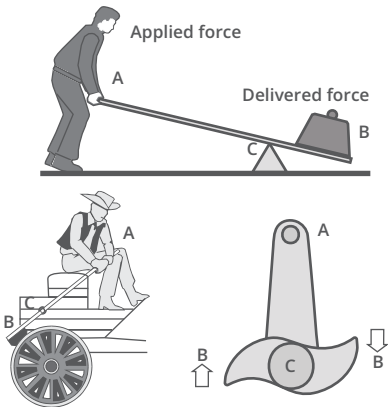


Figure 4. Various levers. Compare points A, C, B to the previous lever diagram (Fig. 3)

B. Use of air

Force can also be multiplied by the use of air to gain a further mechanical advantage. Everyone has felt the power of air on a windy day. Air can be compressed into a much smaller space than it normally occupies. For instance, air is compressed in tires to support the weight of a vehicle. The smaller the space into which air is squeezed, the greater the air's resistance to being squeezed. This resistance creates pressure, which is used to gain mechanical advantage.

If a constant supply of compressed air is directed through a pipe that is one-inch square, and if a one-square-inch plug was placed in the pipe, the compressed air would push against the plug. Holding a scale against the plug would register how many pounds of force were being exerted by the air against the plug.

If the scale registered 10 lb., for example, then it could be said the force was 10 lb. on the one-square-inch surface of the plug (Fig. 5). This would be 10 lb. per square inch (psi).

The more the air in the supply tank has been compressed, the greater the force that would be exerted on the face of the plug.




Figure 5. Pounds per square inch (psi)

C. Leverage and air pressure

In actual operation, pipes are round and plugs are diaphragms of flexible material acting against push rods. If compressed air of 120 psi acts on a diaphragm of 30 square inches (Fig. 6), 3,600 lb. of force is produced (120×30). Apply this force to a push rod to move a six-inch slack adjuster operating a cam, and the total force equals 21,600 inch pounds torque ($3,600 \times 6$), or 1,800 foot pounds torque ($21,600 \div 12$). It requires between 80 and 100 foot pounds of torque to tighten the wheel on a car. This comparison illustrates the power obtained from using mechanical leverage and air pressure combined.

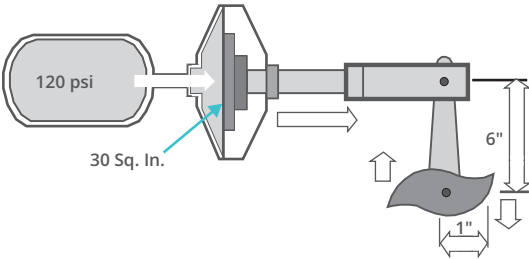


Figure 6. Air pressure combined with leverage

Stopping distance

In addition to the factors mentioned on page 3, you need to understand what the term stopping distance means. Stopping distance consists of three factors:

Driver's reaction time + Brake lag + Braking distance.

Reaction time

The time it takes from the moment a hazard is recognized to the time the brake pedal is applied, approximately 3/4 of a second to 1 1/2 seconds.

Brake lag

The time air takes to travel through a properly maintained air brake system, about 4/10 of a second.

Braking distance

The actual distance a vehicle travels after the brake is applied until the vehicle stops. This distance depends on the ability of the lining to produce friction, the brake drums to dissipate heat and the tires to grip the road.

Professional drivers never take brakes for granted. The braking system must be tested and adjustment checked before placing a vehicle into service. Professionals understand the braking system, realize its capabilities and limitations, and learn to use it to their advantage.

Heavy vehicles require powerful braking systems that are obtained by use of mechanical leverage and air pressure. Brakes must be used keeping in mind the heat generated by friction. If heat becomes too great, braking effectiveness will be lost. The heavier the load and the faster the speed, the greater the power needed to stop.

The professional driver is well aware that the vehicle, even with properly adjusted brakes, will not stop as quickly as a passenger vehicle.

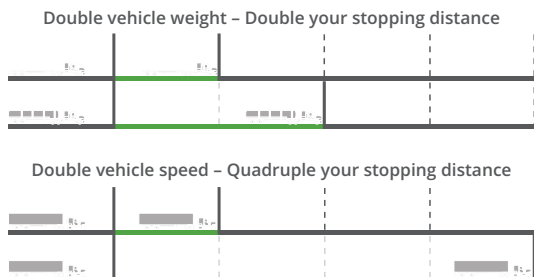


Figure 7. Stopping distance

Section summary

1. What is the final factor that will determine if the vehicle will move?
2. What is the final factor that will determine if the vehicle will stop?
3. How is heat generated by the brakes dissipated?
4. If one set of brake shoes is poorly adjusted, what effect could it have on the remaining set of brake shoes in the system?
5. What is meant by the term friction?
6. If the weight of the vehicle is doubled, how many times must the stopping power be increased?
7. If vehicle speed is doubled, how many times must stopping power be increased to be able to stop in the same distance?
8. If vehicle weight and speed are both doubled, how many times must the stopping power be increased to be able to stop in the same distance?
9. What is compressed air?
10. What does the abbreviation psi stand for?
11. If 40 psi is exerted against a diaphragm of 30 square inches, what is the total pounds of force that could be exerted?
12. What is meant by the following terms: reaction time, brake lag, braking distance and stopping distance?

Answer key on page 69

3. Basic system components

The five main components of an elementary air brake system and their purposes are:

- 1. Compressor:**
to build up and maintain air pressure
- 2. Reservoirs:**
to store the compressed air
- 3. Foot valve:**
to draw compressed air from reservoirs when it's needed for braking
- 4. Brake chambers:**
to transfer the force of compressed air to mechanical linkages
- 5. Brake shoes and drums or brake rotors and pads:**
to create the friction needed to stop the vehicle

Compressor

The function of the air compressor (Fig. 8) is to build up and maintain air pressure required to operate air brakes and air-powered accessories.

Air compressors are either gear driven directly from the engine or belt driven. Although most compressors use the truck's lubrication and cooling systems, some are self-lubricated and some are air cooled. Self-lubricated compressors must have their oil checked and changed at regular intervals.

The compressor's intake system draws air from either its own air filter or from the engine's intake system.

Compressors that have their own filtration system must be serviced on a regular basis.

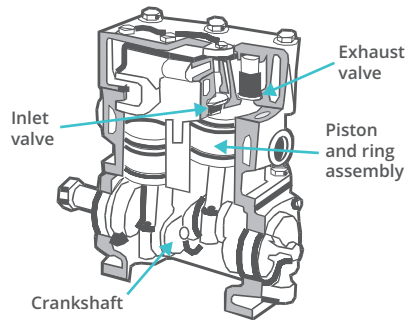


Figure 8. Air compressor

All compressors run continuously while the engine is running, but air compression is controlled and limited by a governor which loads or unloads the compressor. In the loaded stage, air is pumped into reservoirs. In the unloaded stage (with two cylinder compressors), the compressor pumps air back and forth between the two cylinders without supplying the reservoirs

The governor must take the compressor out of its pumping stage (unload/cut-out) when system air pressure reaches 120 to 145 psi (828 to 1,000 kPa), and also put it back into the pumping stage at a minimum of 100 psi (690 kPa).

Reservoirs

Reservoirs are pressure-rated tanks, which hold a supply of compressed air until required for braking or operating auxiliary air systems. They must store a sufficient volume of air to allow several brake applications if the engine stops or the compressor fails.



Figure 9. Typical reservoir drain valves

The maximum air pressure available for brake applications depends on how much air is in the reservoir. A driver is not able to make a higher pressure brake application than there is air pressure in the reservoir.

Each reservoir is equipped with a drain valve called a draincock (Fig. 9). Fully opening the draincock allows reservoirs to be drained of moisture and other contaminants that build up in the system. **All reservoirs must be completely drained once a day when in use.**

Foot valve (application or treadle valve)

This foot-operated valve (Fig. 10) applies air to operate the brakes. The amount of air delivered to the brakes is regulated by the driver according to the distance the treadle or brake pedal is depressed. Releasing it exhausts air in the service brakes through its exhaust port.

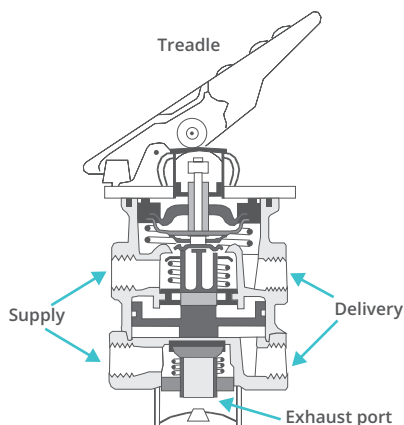


Figure 10. Dual-circuit foot valve

These valves are made in overhead styles with a foot pedal hanging down, or a floor-mounted version with a foot treadle.

Service-brake chambers (brake pots)

Service-brake chambers (Fig. 11) convert compressed air pressure energy into mechanical force and movement, which apply the vehicle's brakes.

When you press down on the foot valve, air pressure enters the pressure side of the brake chamber through the inlet port and forces against the diaphragm, which moves the push rod assembly forward. When air pressure is released from the service-brake chamber, the return spring returns the diaphragm and push rod to their released positions.

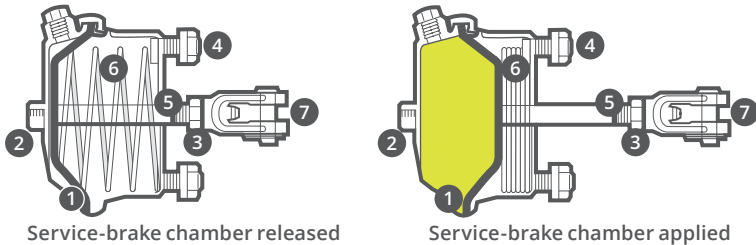


Figure 11. Clamp-ring type service brake chamber

- | | |
|-------------------|----------------------|
| 1. Diaphragm | 5. Push rod assembly |
| 2. Inlet port | 6. Return spring |
| 3. Lock nut | 7. Yoke |
| 4. Mounting bolts | |

Brake shoes and drums

Figure 12 illustrates the common **S-cam** brake assembly used on truck and trailer axles. Front brake assemblies have the brake chamber and slack adjuster mounted on the backing plate because the steering action of the front axle would otherwise interfere.

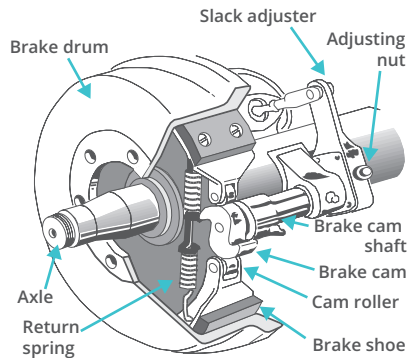


Figure 12. S-cam brake assembly

The diagram shows the brakes in the applied position. The S-cam is rotated so the high points have acted against the **cam rollers** and forced the brake shoes against the drum.

When the brakes are released, the brake cam shaft returns the brake cam to the normal position. The cam rollers roll down into the crook of the S-cam as the brake shoe return spring pulls the shoes away from the drum.

Brake lining material is attached to the face of the shoes. Lining material is selected according to the type of service the brakes are subjected to. Linings must give consistent braking output with minimum fade at high temperatures.

Brake shoes generate heat through friction with the brake drum surface. Drum thickness determines the amount of heat that can be absorbed and dissipated to the atmosphere. Thin or distorted drums, weak return springs, improper linings, poor adjustment, or grease or dirt on the lining, will all result in erratic, unpredictable and potentially dangerous brake performance.

Disc brakes (rotors and pads)

Some trucks are now equipped with disc brakes. Unlike most drum brake designs that have a separate, external automatic or manual slack adjuster, disc brakes are equipped with an internal, automatic, wear-adjusting system that is located inside the sealed unit. If your truck is equipped with disc brakes, consult the owner's manual for more information.

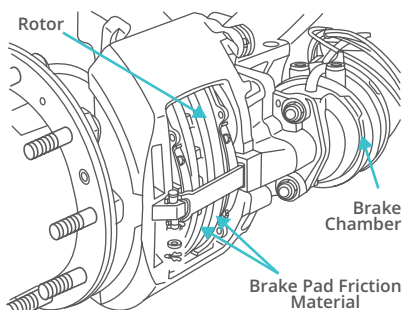


Figure 13. Air disc brake

4. Basic system operation

Basic air brake system

Air is pumped by the compressor to the reservoir. When air pressure reaches 120 to 145 psi (828 to 1,000 kPa), the governor places the compressor into its unloaded stage. At this stage the air system is fully charged (Fig. 14).

When the brakes are applied, air is delivered through the foot valve to the service-brake chambers (Fig. 15). Air pushes against each service-brake diaphragm causing the push rod to move the **slack adjuster** (see page 54). The slack adjuster rotates the brake cam, which forces the shoes against the brake drum.

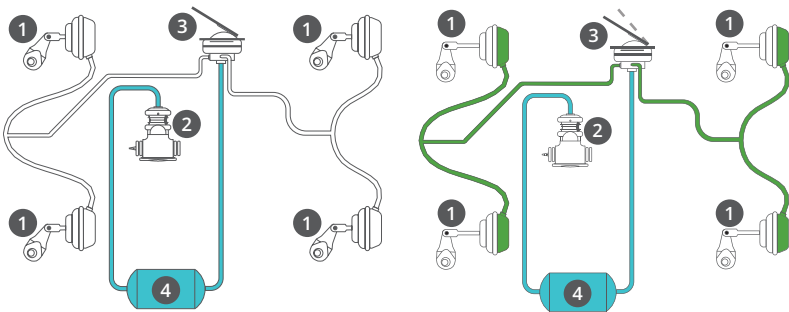


Figure 14. Basic air brake system

Figure 15. Brake application

- 1 Brake chambers
- 2 Compressor
- 3 Foot valve
- 4 Reservoir

When you release the foot valve, air in the brake chambers is exhausted through the foot valve, which releases the brakes.

When reservoir air pressure drops, the governor puts the compressor back into the pumping stage at a minimum of 100 psi (690 kPa) to keep adequate air pressure available for future brake applications.

Additions to the basic system

Several additions (Fig. 16) can be made to the basic system to improve it:

- service reservoir
- safety valve
- one-way check valve
- air pressure gauge
- relay valve
- low air warning switch
- automatic front brake ratio valve

Reservoir

Figure 16 shows that an additional air reservoir has been added. Since the first reservoir is closest to the compressor it is now called the **supply** reservoir. It is sometimes called the wet reservoir because most of the water and oil from the compressor gathers here.

The second reservoir is called the **service reservoir**. Air is drawn from this reservoir to operate the brakes.

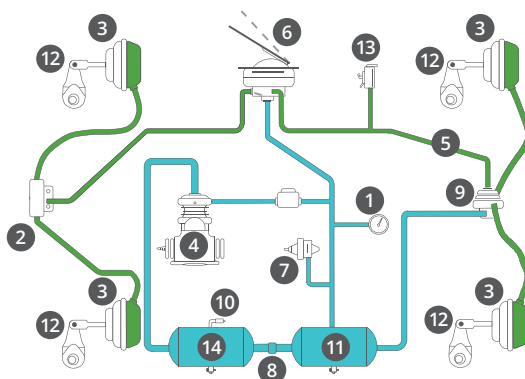


Figure 16. Basic system plus additions

- | | |
|-------------------------------------|---------------------------|
| 1 Air pressure gauge | 8 One-way check valve |
| 2 Automatic front brake ratio valve | 9 Relay valve |
| 3 Brake chambers | 10 Safety valve |
| 4 Compressor | 11 Service reservoir |
| 5 Control line | 12 Slack adjusters |
| 6 Foot valve | 13 Stop light switch |
| 7 Low air warning switch | 14 Supply (wet) reservoir |

Safety valve

The supply reservoir is protected from being over-pressurized and bursting by a **safety valve** (Fig. 17). This valve is pre-set (usually at 150 psi [1,034 kPa]) and will blow off excess pressure. Once pressure is lowered, the safety valve will re-seal until an over-pressurized condition exists again. If a safety valve blows off excess pressure, this indicates a problem with the governor. The problem should be dealt with immediately by a qualified person.

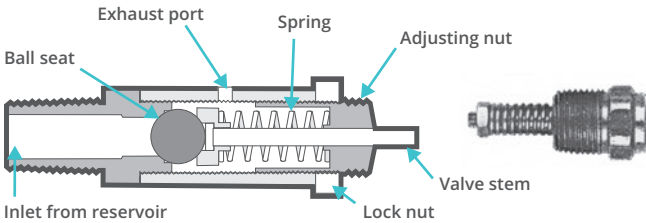


Figure 17. Safety valves

One-way check valve

In case the air compressor fails or a leak develops in the supply reservoir, a **one-way check valve** (Fig. 18) is installed between the supply and service reservoirs to keep air from bleeding back. The valve is spring loaded. Pressure at the inlet side overcomes spring pressure and lifts a check ball or disc off its seat. Air passes through the valve to the outlet. When pressure at the outlet becomes greater than at the inlet, together with spring pressure, the check device seals, preventing air from flowing back through the valve.

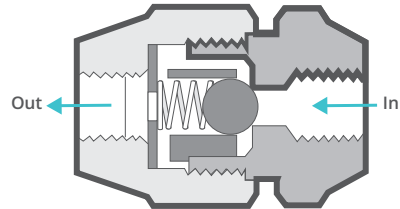


Figure 18. One-way check valve

Air pressure gauge

An air pressure gauge (Fig. 19) is installed in the dash (plumbed in after the service reservoir) so you'll know the amount of air pressure available for braking.




Figure 19. Air pressure gauge

Air governor

The **governor** (Fig. 20), which is usually compressor mounted, operates in conjunction with the compressor and maintains reservoir air pressure between a predetermined maximum and minimum pressure.

- cut-out pressure 120 to 145 psi (828 to 1,000 kPa) maximum
- cut-in pressure 100 psi (690 kPa) minimum

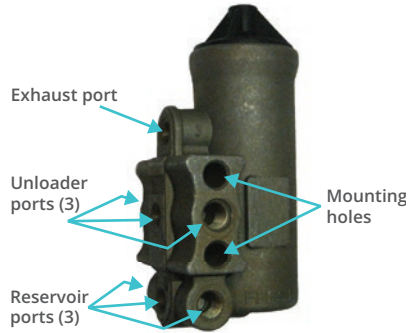


Figure 20. Air governor

The governor will normally cut in 20-25 psi below the cut-out pressure.

Relay valve

On long wheelbase trucks and tractors and on trailers, the distance from the brake chambers to the foot valve is too far to cause immediate application of the brake when the foot valve is depressed. This is called **brake lag**. To correct this situation, a **relay valve** (Fig. 21) is installed near the rear brake chambers. A large diameter pipe is connected between the service reservoir and relay valve. The air line from the foot valve to the relay valve now becomes a **control line** that signals to the relay valve the amount of air to be drawn from the service reservoir for faster application of the brakes. A quick-release valve is built in for faster release of the brakes.

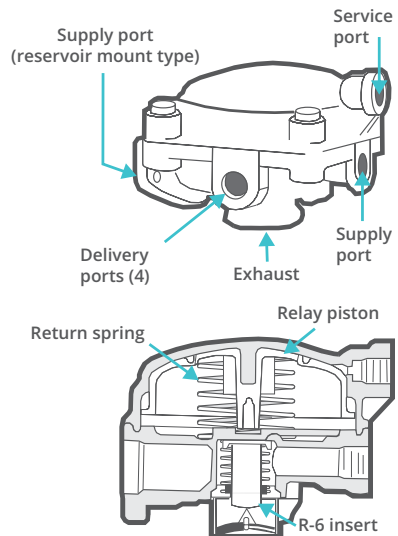


Figure 21. Relay valve

Low air warning switch

A **low air warning switch** is installed after the supply reservoir to alert you when air pressure drops below a safe level (60 psi [414 kPa]). The switch activates either (or a combination of) a **buzzer** or **warning light**. If the low air warning system activates, you must stop and determine the cause. The warning light **must** be operational. The buzzer is optional.

Stop light switch

The stop light switch (Fig. 22) is an air-signaled electrical switch which is turned on any time a brake application is made. The switch is usually connected to a double check valve and can be plumbed anywhere in the application side of the circuit. In a tractor system it is usually plumbed into the two-way check valve that is matched with the tractor protection valve.

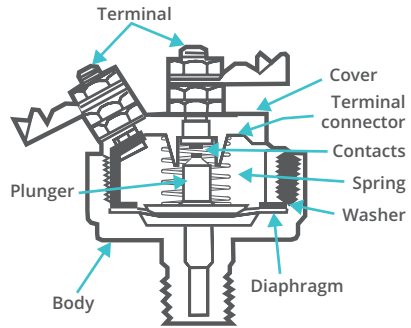


Figure 22. Stop light switch

Quick-release valve

The function of a quick-release valve (Fig. 23) is to rapidly exhaust air from the controlled device. It is normally located adjacent to the controlled device, rather than requiring exhaust air to return and exhaust through the control valve. This decreases release time.



Figure 23. Quick-release valve

Front axle ratio valve

Designed for use on dual-air system vehicles, the **ratio valve** (Fig. 24) is installed in the front axle delivery line. During normal brake applications, this valve automatically reduces application pressure to the front axle brakes. As brake application pressure increases, the percentage of reduction is decreased until about 60 psi (413 kPa) (depending on valve design) when full pilot pressure is delivered. The valve is available with several different “hold-off” pressures, which prevent the front brakes from operating until this “hold-off” pressure is exceeded.




Figure 24. Front axle ratio valve

Note: Older trucks may be equipped with a front wheel limiting valve controlled by a switch on the dash. When activated, this valve will reduce application pressure on the steering axle brakes by 50%.

Air dryer

The air dryer (Fig. 25) is a desiccant-type in-line filtration system that removes most liquid and water vapour from compressor discharge air before it reaches the air brake reservoirs. This results in only clean, dry air being supplied to the air brake system, aiding in the prevention of air-line freeze-ups.

Air dryers utilize a replaceable desiccant material that has the ability to strip water vapour from moisture laden air. The desiccant material is regenerative, in that its absorptive properties are renewed each time the compressor is reloaded.



Figure 25. Air dryer

The air dryer end cover is equipped with an automatic drain valve, controlled by the air-system governor, and is also equipped with an integral heating element.

Air dryers do not remove all the moisture. **The reservoirs still need to be drained daily when in use.**

Section summary

1. How can you tell how much air pressure is in the main reservoir?
2. What must you do when a low pressure warning system activates?
3. What is the purpose of a quick-release valve?
4. What is the purpose of a relay valve?
5. How is the reservoir protected from over-pressurization?
6. At what pressure will the low-pressure warning device activate?
7. How is “brake lag” to rear wheels minimized?

Answer key on page 70

5. Dual air systems

Note: All piping diagrams are used to illustrate basic dual circuit principles only, and are not to be interpreted as regulations for, or specifications of, dual air-brake systems.

Virtually all heavy-duty vehicles on the road today are using a **dual-circuit air system** (Fig. 26). The system has been developed to prevent total brake failures and give you more control by allowing the truck to be brought to a stop in a safe location (Fig. 27). At first glance, the dual system might seem complicated, but if you understand the basic air system described so far, and if the dual system is separated into its basic functions, it becomes quite simple.

As its name suggests, the dual system is two systems or circuits in one. There are different ways of separating the two parts of the system. On a two-axle vehicle, one circuit operates from the primary reservoir and the other circuit operates from the secondary reservoir.

If one circuit has a failure, the other circuit is isolated and will continue to operate.

Under normal operating conditions the primary reservoir operates the rear service brakes and the secondary reservoir operates the front service brakes.


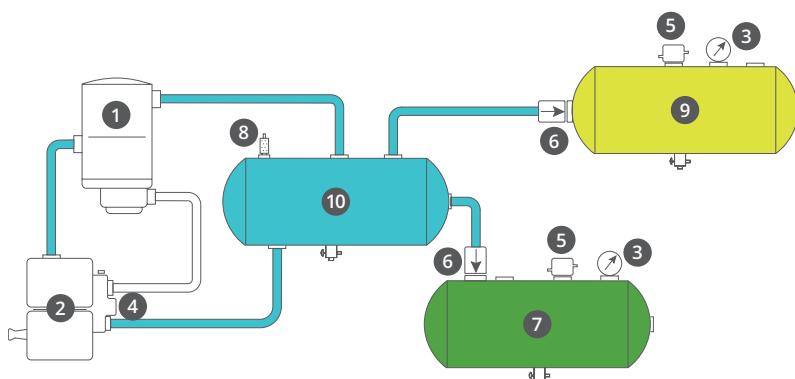



Figure 26. Simple dual circuit

- | | |
|---------------------|-----------------------|
| ● Supply circuit | 5 Low pressure switch |
| ● Primary circuit | 6 One-way check valve |
| ● Secondary circuit | 7 Primary reservoir |
| 1 Air dryer | 8 Safety valve |
| 2 Compressor | 9 Secondary reservoir |
| 3 Gauge | 10 Supply reservoir |
| 4 Governor | |

Supply circuit failure

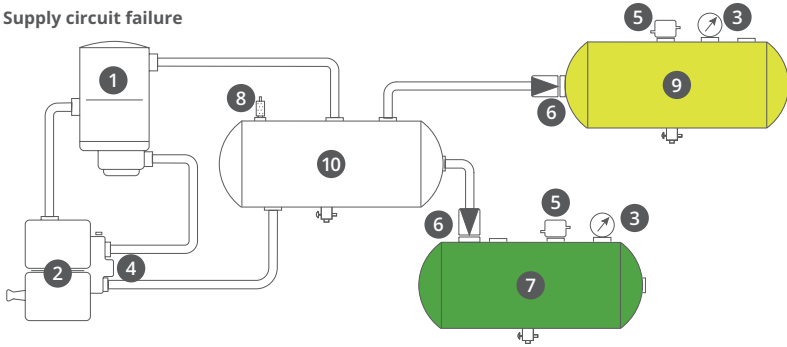

Secondary circuit failure

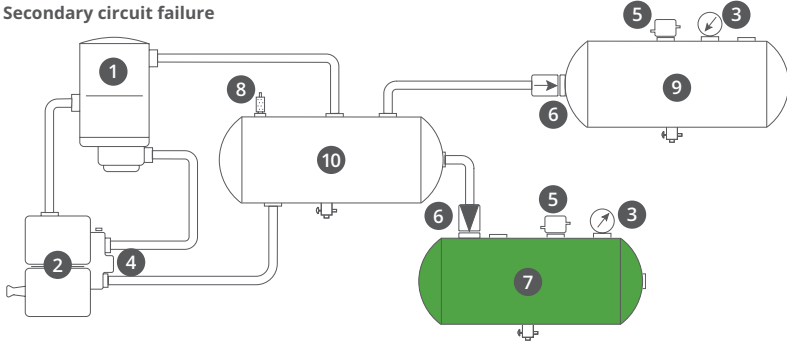

Primary circuit failure

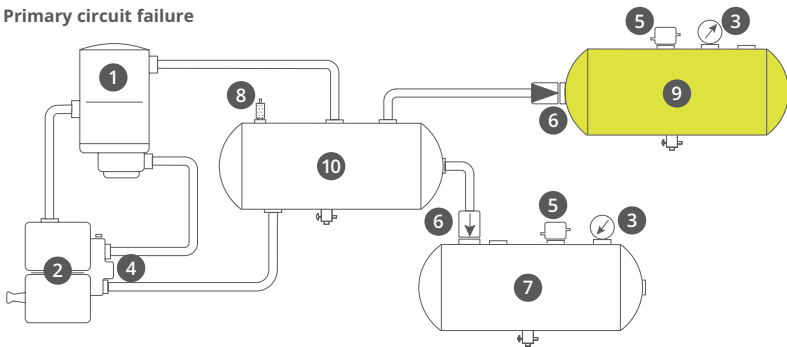


Figure 27. Simple dual-circuit failures

- | | |
|---------------------|-----------------------|
| ● Supply circuit | 5 Low pressure switch |
| ● Primary circuit | 6 One-way check valve |
| ● Secondary circuit | 7 Primary reservoir |
| 1 Air dryer | 8 Safety valve |
| 2 Compressor | 9 Secondary reservoir |
| 3 Gauge | 10 Supply reservoir |
| 4 Governor | |

Dual-circuit air system

In Figure 28, air is pumped by the compressor to the supply reservoir, which is protected from over-pressurization by a safety valve. Pressurized air moves from the supply reservoir to the primary reservoir (green) and the secondary reservoir (yellow) through one-way check valves. At this point, the dual circuits start. Air from the primary reservoir is directed to the foot valve. Air is also directed from the secondary reservoir to the foot valve. The foot valve is divided into two sections (two foot valves in one). One section of this dual foot valve controls the primary circuit and the other section controls the secondary circuit.

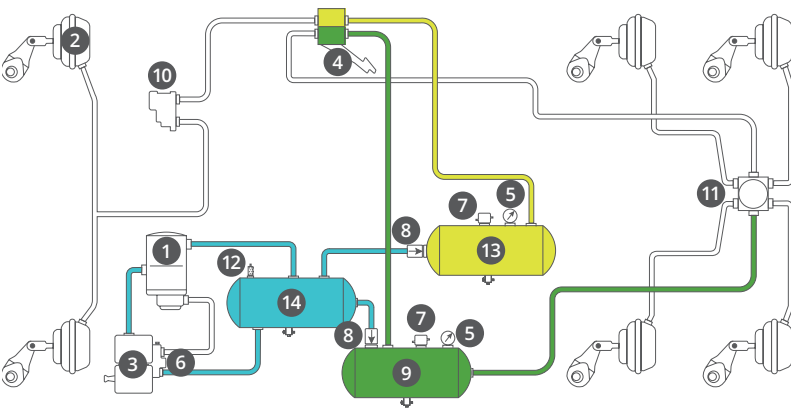


Figure 28. Simple dual circuit with brakes released

- | | |
|---------------------|------------------------|
| ● Supply circuit | 7 Low pressure switch |
| ● Primary circuit | 8 One-way check valve |
| ● Secondary circuit | 9 Primary reservoir |
| 1 Air dryer | 10 Ratio valve |
| 2 Brake chambers | 11 Relay valve |
| 3 Compressor | 12 Safety valve |
| 4 Foot valve | 13 Secondary reservoir |
| 5 Gauge | 14 Supply reservoir |
| 6 Governor | |

When a brake application is made (Fig. 29), air is drawn from the primary reservoir (green) through the foot valve and is passed on to the relay valve, which delivers air from the primary reservoir to the rear brake chambers. At the same time, air is also drawn from the secondary reservoir (yellow), passes through the foot valve and is passed on to the front brake chambers.

If there is an air loss in either circuit, the other circuit will continue to operate independently (Fig. 30 and Fig. 31). Unless air is lost in both circuits, the vehicle will continue to have braking ability. The primary and secondary circuits are equipped with low-pressure warning devices and pressure gauges.

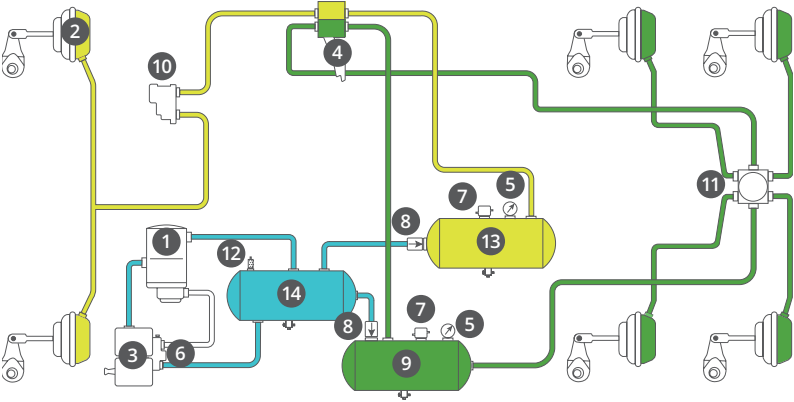


Figure 29. Simple dual circuit with brakes applied

● Supply circuit	7 Low pressure switch
● Primary circuit	8 One-way check valve
● Secondary circuit	9 Primary reservoir
1 Air dryer	10 Ratio valve
2 Brake chambers	11 Relay valve
3 Compressor	12 Safety valve
4 Foot valve	13 Secondary reservoir
5 Gauge	14 Supply reservoir
6 Governor	

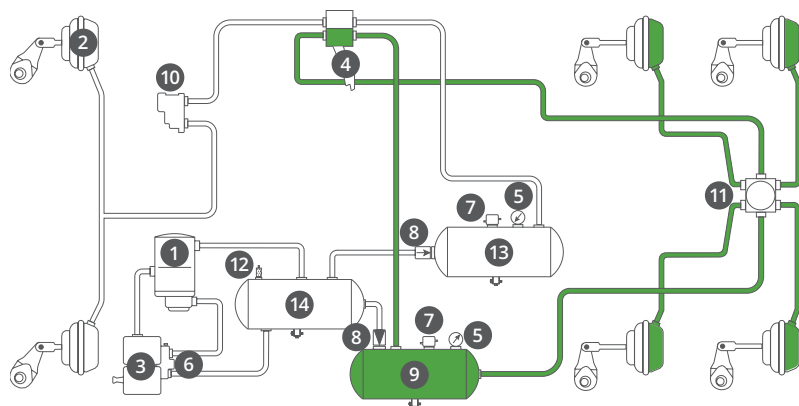


Figure 30. Secondary circuit failure with brakes applied

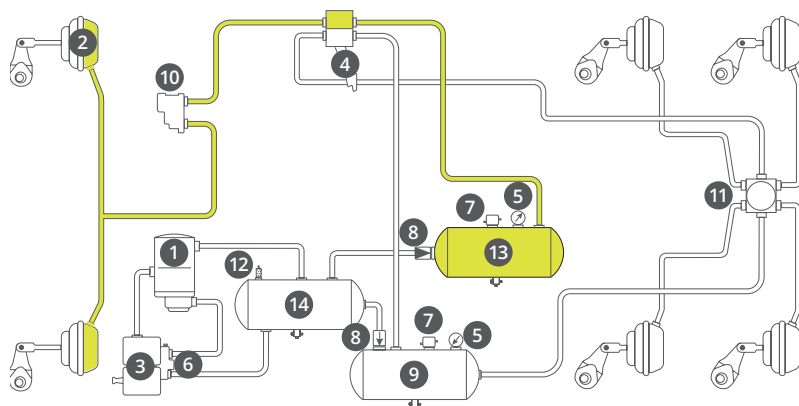


Figure 31. Primary circuit failure with brakes applied

- | | |
|---------------------|------------------------|
| ● Supply circuit | 7 Low pressure switch |
| ● Primary circuit | 8 One-way check valve |
| ● Secondary circuit | 9 Primary reservoir |
| 1 Air dryer | 10 Ratio valve |
| 2 Brake chambers | 11 Relay valve |
| 3 Compressor | 12 Safety valve |
| 4 Foot valve | 13 Secondary reservoir |
| 5 Gauge | 14 Supply reservoir |
| 6 Governor | |

Spring-brake chambers (emergency/park brake)

A spring-brake chamber functions as a service-brake chamber, an emergency brake in case of air-pressure loss somewhere in the system, and as a reliable spring-applied parking brake (Fig. 33). Spring brakes are installed in the same manner as service brakes and are always installed on the front tandem axle. Spring brakes are often installed on both rear axles in a tandem-axle unit. They are a reliable parking brake because they are held on by spring pressure and require no air.

Spring brakes consist of two separate air chambers. The front chamber is essentially a service-brake chamber, and is used to perform the service-brake function. The rear chamber houses a large, powerful compression spring and diaphragm and performs emergency and parking functions. It's sometimes called a "piggyback."

Caution: Never disassemble a spring brake. Serious injury may result. All discarded spring-brake chambers must be disassembled and disposed of by a trained professional.

Service-brake chamber

The service-brake chamber applies the brake by air pressure and releases it by spring pressure (just like a single service-brake chamber).

Using an **opposite action**, the spring-brake chamber applies the spring brake by spring pressure and releases it by air pressure. In the event of air-pressure loss (an emergency or an intentional exhausting of air by the driver, e.g., while parking), the power spring will push the diaphragm and push rod down and apply the brake. During normal operation, air pressure keeps the power spring compressed and allows the service brake to operate normally.

If air pressure cannot be restored and it's necessary to move the vehicle, the power spring can be compressed manually by the use of a **wind-off** bolt.

Parking-brake system

Installation of parking brakes and piping arrangements into a vehicle air brake system will vary, depending on the vehicle make.

Control valves will vary, depending on the manufacturer and type of piping arrangements.

The type of spring-loaded valve shown (Fig. 32) requires that the driver push the button to release the parking brakes. If the air pressure in the system falls below approximately 70 psi (483 kPa), the spring brakes may begin to drag and if it falls between 20-45 psi (138-310 kPa), will fully apply. On many vehicles the parking brake control valve on the dash will close, however some valves may never close. The important thing is that the spring brakes are fully applied before the air is depleted. If the button does not pop out, walk to the rear of the tractor and check the brakes have applied – the slack adjuster and push rod should be at a 90° angle. Similar types of spring-loaded valves require you to pull the button out to release the parking brakes.

Note: On some newer models the park brake button will not pop out automatically. However, the brakes will still apply.

There is a toggle control valve in use that does not have an automatic brake application feature. The park brakes will gradually apply as the air pressure is depleted, however, the control valve will not move. When air pressure is restored, the park brakes will release if the toggle valve is not manually moved to the park brake “on” position.

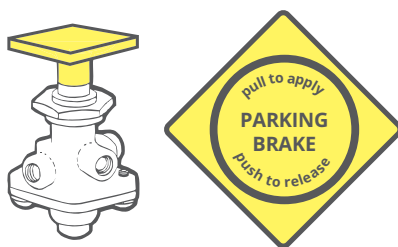



Figure 32. Park-brake control valve

Caution: Compounding the brakes happens when a service brake application is made with the park brake still applied. This can result in damaged brake components and possibly brake failure. To avoid compounding, the park brake should be released before a foot brake application is made.

Note: An anti-compound line (see Fig. 34) is sometimes installed between the delivery side of the primary circuit relay valve and the control side of the relay valve operating the spring brakes. When a brake application is made, the relay valve operating the spring brakes gets a signal from the service brake to release the spring brakes with the same amount of pressure applied to the service brakes. This prevents service-brake and spring-brake pressure from compounding on the brake linkages.


System charged – normal running condition

With air pressure of 70 psi (483 kPa) or greater acting upon the emergency diaphragm (A) and piston (B) in the spring hold-off cavity, the spring (C) is fully compressed and the piston (B) is held in the released position. This does not affect the service diaphragm (D) or service push plate and rod (E).

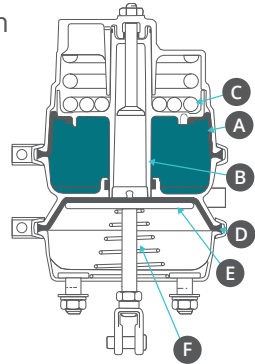


Park and emergency application

When you operate the park control valve, air is exhausted from the spring hold-off cavity. The spring (C) is now allowed to extend, forcing the piston (B) and the diaphragm (A) forward. The piston (B) forces the service diaphragm (D) and service push plate and rod (E) forward compressing the return spring (F) and applying the brakes. To release the park application, the park control valve is placed in the release position, releasing the brakes as described under "System charged – normal running condition."

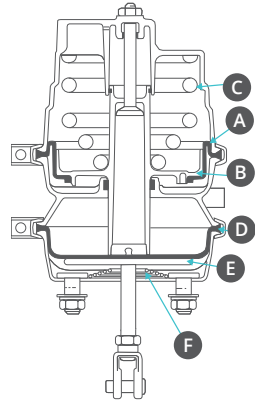

Service application

During a controlled service brake application, air pressure enters the service port and acts upon the service diaphragm (D), which forces the service push plate and rod (E) forward, applying force to the slack adjuster. The slack adjuster rotates the camshaft and applies the brakes. The emergency spring is held in the compressed position by air pressure in the spring hold-off cavity.

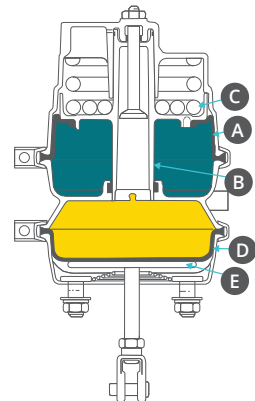










-  Spring-brake hold-off pressure
-  Service air pressure
-  Atmospheric pressure
-  Emergency diaphragm
-  Piston
-  Spring
-  Service diaphragm
-  Service push plate and rod
-  Return spring

Figure 33. Spring brakes

Dual-circuit system with spring parking brakes

When spring brakes are added to a dual-circuit system, the same type of dash control valve discussed previously is used (Fig. 34). Blended air is used to supply the control valve. Blended air is taken from the primary and secondary circuits through a two-way check valve.

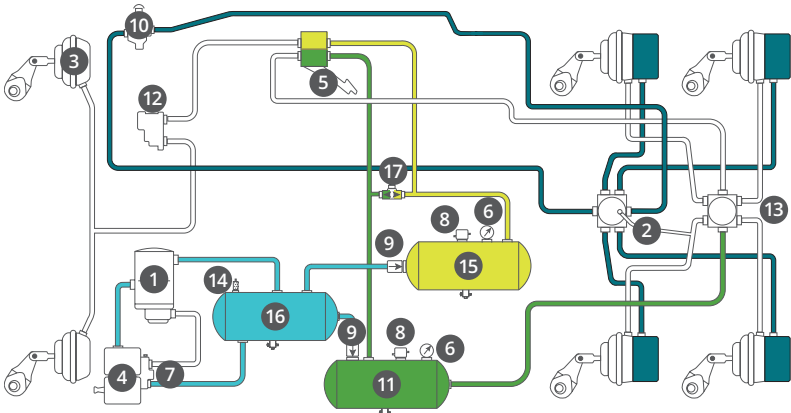


Figure 34. Dual-circuit system with spring parking brakes.

Relay valve installed in spring-brake circuit to quickly apply and release spring brakes

- | | |
|--|--|
| ● Supply circuit | 8 Low pressure switch |
| ● Primary circuit | 9 One-way check valve |
| ● Secondary circuit | 10 Park brake control |
| ● Spring-brake circuit | 11 Primary reservoir |
| 1 Air dryer | 12 Ratio valve |
| 2 Anti-compound line | 13 Relay valve |
| 3 Brake chambers | 14 Safety valve |
| 4 Compressor | 15 Secondary reservoir |
| 5 Foot valve | 16 Supply reservoir |
| 6 Gauge | 17 Two-way check valve |
| 7 Governor | |

Two-way check valve

This valve (Fig. 35) allows air to be directed to one delivery pipe from either of two sources. A two-way check valve allows the source applying the higher pressure to shift the shuttle so that the higher pressure will be directed to the delivery port.

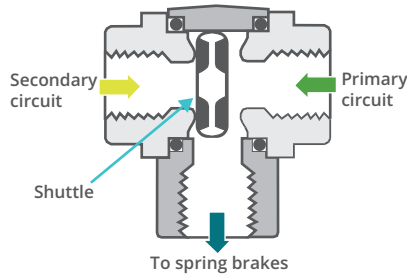


Figure 35. Two-way check valve

With this piping arrangement, the vehicle can have a failure in either circuit without the spring brakes applying automatically. Unless air is lost in both circuits, the spring brakes will not apply.

In Figure 35 the primary circuit has a higher air pressure than the secondary circuit. The shuttle has blocked off the secondary port and the spring brakes are held off by primary air pressure. This also works in the opposite way.

Spring brakes with modulator valve

Spring-type brakes in this system serve as a parking brake and as an emergency system.

If a failure occurs in the primary circuit and a brake application is made, control air from the secondary side of the foot valve is directed to a spring-brake modulator (Fig. 36).

As there is no primary supply air to maintain balance in the modulator valve (due to the primary circuit failure), the modulator valve then exhausts air pressure from the spring-brake circuit. The amount of air released is equal to the amount of air applied by the foot valve. Release of air in the spring-brake circuit causes the drive axle to brake using spring-brake pressure. When the brake is released, supply air from the secondary circuit returns the spring brakes to an off position.

Brake applications can be repeated until all the air from the secondary circuit is lost, but as air pressure drops below 70 psi (483 kPa), the spring brakes won't return to full off position – in fact, they will start to drag. At about 20 psi (138 kPa), the spring-brake control valve on the dash exhausts the remaining air in the spring-brake circuit, and the spring brakes are fully applied. The only way the vehicle can be moved after all air is lost is to repair the damaged circuit and recharge the system, or use the wind-off bolts to compress the power spring. This process is called caging the brakes.

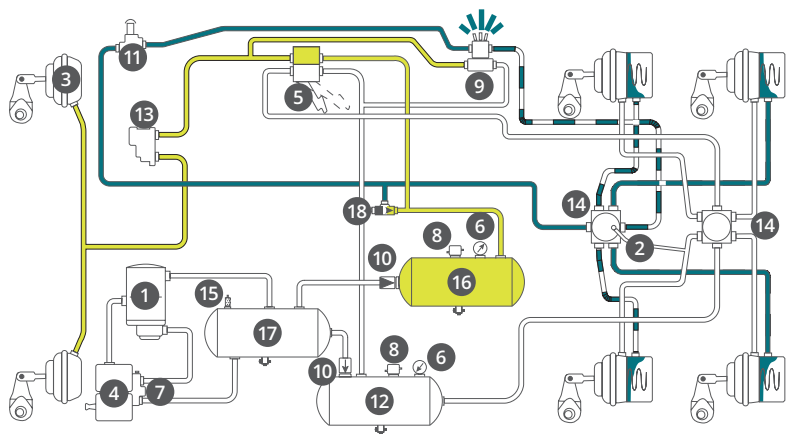


Figure 36. Spring brakes with modular valve – primary circuit failure

● Supply circuit	8 Low pressure switch
● Primary circuit	9 Modulator valve
● Secondary circuit	10 One-way check valve
● Spring-brake circuit	11 Park brake control
1 Air dryer	12 Primary reservoir
2 Anti-compound line	13 Ratio valve
3 Brake chambers	14 Relay valve
4 Compressor	15 Safety valve
5 Foot valve	16 Secondary reservoir
6 Gauge	17 Supply reservoir
7 Governor	18 Two-way check valve

Section summary

1. What is the basic principle of the dual-circuit system?
2. What valve is used to protect the primary circuit from the secondary circuit?
3. In a dual-circuit system, will the vehicle continue to have braking ability if one circuit fails?
4. What is meant by “compounding” the brakes?
5. Why are spring brakes a reliable type of parking brake?
6. How are parking brakes held in the released position?
7. What is the reason for releasing the parking brakes before making a full brake application test?
8. What is the danger of disassembling a parking-brake unit?
9. Name two functions of the spring brakes in a dual-circuit system.
10. Describe the functions of the spring-brake modulator valve.
11. What is blended air?

Answer key on page 71

6. Tractor system/trailer towing system

To change a two or three-axle unit into a tractor, a tractor system must be added. It consists of the following components:

Tractor protection system

The trailer-supply valve and tractor protection valve make up the tractor protection system. This system prevents air loss from the tractor when not hooked to a trailer or if a trailer breaks away. The minimum pressure at which the tractor protection system must be activated is 20 psi (140 kPa).

Trailer-supply valve

This valve is essentially another dash-mounted control valve (Fig. 37). It has two functions:

1. It controls the tractor protection valve. The tractor protection valve will not operate if the trailer-supply valve is closed.
2. It serves as a link between the tractor and the trailer parking-brake systems by supplying air to the trailer reservoirs, through the supply line.

Air is supplied to the trailer-supply valve by a two-way check valve that is connected to both the primary and secondary circuits. The two-way check valve only takes air from the highest pressure circuit, which prevents loss of air from a failed circuit.

The trailer-supply valve (usually a red octagonal button) is mounted in the cab of the vehicle, easily accessible to the driver. You open the valve by pushing or pulling the button, depending on the type used.

Opening the valve permits main reservoir pressure to flow through the valve. This pressure is piped to the tractor protection valve and the supply-line gladhand. The spring-loaded valve is held in the open position when sufficient air pressure is reached. If pressure drops to 20 psi (140 kPa), some



Figure 37. Trailer-supply valve

valves will shut automatically by spring pressure, opening the exhaust port. On some vehicles the button may not pop out, however the spring brakes will apply. Always ensure the spring brakes have been fully applied. You can close the valve manually to uncover the exhaust port.

Note: The trailer-supply valve has also been referred to as the emergency valve.

Manually-operated trailer-supply valves

Some vehicles are equipped with a different type of cab-mounted trailer-supply valve, which must be operated manually by the driver. It has two positions: **NORMAL** and **EMERGENCY**. The important difference is that this trailer-supply valve must be shifted to the **EMERGENCY** position manually.

Charging the trailer system

Place the trailer-supply valve in the **NORMAL** position and reservoir air will be directed to the tractor protection valve and supply-line gladhand.

Trailer breakaway

Rapid loss of air pressure in the supply line will cause the trailer brakes to dynamite. Dynamiting is an emergency application of the trailer brakes.

Tractor protection valve

A tractor protection valve (Fig. 38) is usually mounted on the cab or chassis of the tractor.

When the trailer-supply valve is open, air passes through the bottom of the tractor protection valve and charges the trailer through the supply line (also called the emergency line).

When the pressure in the supply line reaches 45 psi, the service line port of the tractor protection valve opens. This allows application air pressure to travel down the service line to the trailer when a brake application is made.

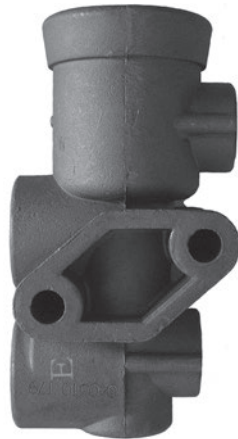


Figure 38. Tractor protection valve

Note:

- The supply line always contains the same air pressure as is in the highest-pressure circuit (provided the trailer-supply valve is open).
- The service line only contains air pressure when a brake application is made and the trailer-supply valve is open.
- When you are not hooked to a trailer, the trailer-supply valve is closed and there will be no air to the tractor protection valve. Spring pressure closes the service line port. This action protects the application air pressure in the truck.
- On a trailer breakaway, air will rush out of the supply line until the trailer-supply valve automatically closes (automatic type). This prevents any more loss of air from the tractor.

Trailer hand-control valve

The hand valve, or “spike” (Fig. 39) is added so that you can apply the trailer’s brakes independent of the tractor.

The hand valve is typically supplied from primary and secondary circuits and plumbed to a two-way check valve (which is also fed from the foot valve). The double-check valve isolates either the foot valve or the hand valve, depending on which one has the highest application pressure.



Figure 39. Trailer hand-control valve

Note: Some power units are manufactured without a hand valve.

Independent operation of the trailer brakes has two common uses:

- To couple or uncouple the trailer.
- In the event that the tractor goes into a skid, gentle brake applications using the hand valve may be of some use in trying to straighten out the unit (never apply the hand valve if the trailer goes into a skid).

Caution: The hand valve is not to be used as a parking brake.

Two-way check valve

The two-way check valve (Fig. 35) allows control of the trailer brake by use of the hand valve or foot valve. This valve will permit air to flow from the source that is supplying the higher application pressure. Two-way check valves are installed between the hand valve and the tractor protection valve, and between the foot valve and the tractor protection valve. Two-way check valves can permit a higher brake application to the trailer than the truck.

Gladhands

This term refers to the coupling device used to connect the service and supply lines of the trailer to the truck or tractor. These couplers have a snap-lock position and a rubber seal that prevents air from escaping.

Before connection is made, couplers should be clean and free of dirt and grit. When connecting the gladhands, start with the two seals together and the couplers at a 90° angle to each other. A quick, downward snap will join and lock the couplers. Vehicles equipped with dead-end couplers should have protection plates in use whenever the vehicle is used without a trailer. This will prevent water and dirt from entering the coupler and lines.

If the unit is not equipped with dead-end couplers, the gladhand of the service line can be locked to the gladhand of the supply line to keep water and dirt from entering the unused lines. The cleaner the air supply is kept, the less chance of brake problems.

Gladhands and lines should also be secured to prevent the line from bouncing off the vehicle. This could seriously damage the couplers.

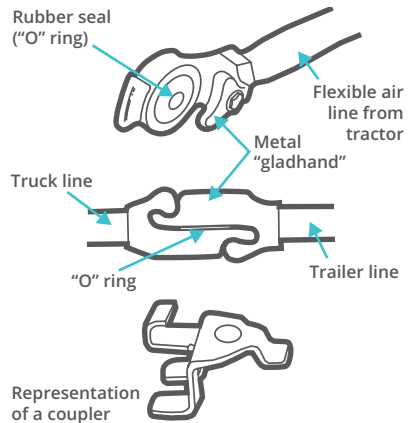


Figure 40. Gladhands

Bobtail proportioning relay valve

Some truck tractors (power units) are equipped with a bobtail proportioning relay valve (Fig. 41), which is a combination of two individual valves in a single housing. The lower portion or body contains a standard service-brake relay valve, which functions as a relay station to speed up brake application and release. The upper portion houses a brake proportioning valve that reduces normal service-brake application pressure when the tractor is not towing a trailer.

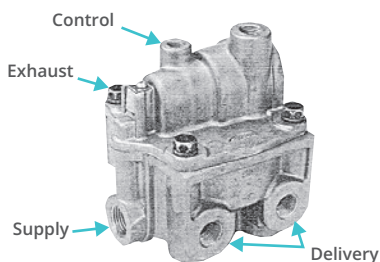


Figure 41. Bobtail proportioning relay valve

During bobtail operation, this valve reduces stopping distances and gives you greater control over the vehicle.

You will note that the brake pedal will have to be pushed farther to apply sufficient air to stop.

Simple tractor-trailer system

In Figure 42, the trailer has been coupled to the tractor and the service and supply lines of the units have been coupled by using gladhands.

The trailer has a reservoir installed. This tank provides a volume of air near the trailer chambers for normal or emergency braking. The tank is equipped with a draincock.

A **relay emergency valve** is mounted on the trailer reservoir. This valve can also be mounted directly on the trailer frame near the brake chambers. The relay emergency valve serves three main functions in the system:

1. The relay part of the valve relays air from the trailer reservoir to the trailer-brake chambers during a brake application. This part of the valve operates like the relay valve previously discussed. It also provides a quick release of the trailer brakes.

2. The emergency part of the valve directs trailer reservoir pressure to the trailer brakes causing an emergency application sometimes referred to as dynamiting. This action occurs automatically in the event of a ruptured or parted supply line between tractor and trailer, or loss of air from the main reservoir system. The driver may operate the cab-mounted trailer-supply valve to cause an emergency application of the trailer brakes.
3. The relay emergency valve has a one-way check valve that stops air in the reservoir from going back to the source of the supply. The driver has opened the trailer-supply valve to allow main-reservoir air pressure to be directed through the tractor protection valve to the trailer. Air pressure passes through the relay emergency valve to the trailer reservoir. Pressure builds up in the trailer reservoir to the same pressure as the main reservoirs on the tractor. This is known as charging the trailer system. The trailer-supply valve remains in the open position when pressure has built up to between 20 and 60 psi (138 and 413 kPa), depending on the make.

Drivers can check the operation of the relay emergency valve by closing the supply valve on the tractor or by disconnecting the supply line between the tractor and trailer with the supply valve in the open position.

Legend

- | | |
|---|---|
|  Supply circuit |  12 One-way check valve |
|  Primary circuit |  13 Parking brake |
|  Secondary circuit |  14 Primary reservoir |
|  Spring-brake and trailer supply circuit |  15 Ratio valve |
|  Trailer reservoir circuit |  16 Relay emergency valve |
|  1 Air Dryer |  17 Relay valve |
|  2 Anti-compound line |  18 Safety valve |
|  3 Brake chambers |  19 Secondary reservoir |
|  4 Compressor |  20 Service line |
|  5 Foot valve |  21 Supply line |
|  6 Gauge |  22 Supply reservoir |
|  7 Gladhands |  23 Tractor protection valve |
|  8 Governor |  24 Trailer reservoir |
|  9 Hand valve |  25 Trailer supply valve |
|  10 Low pressure switch |  26 Two-way check stoplight switch |
|  11 Modulator valve |  27 Two-way check valve |

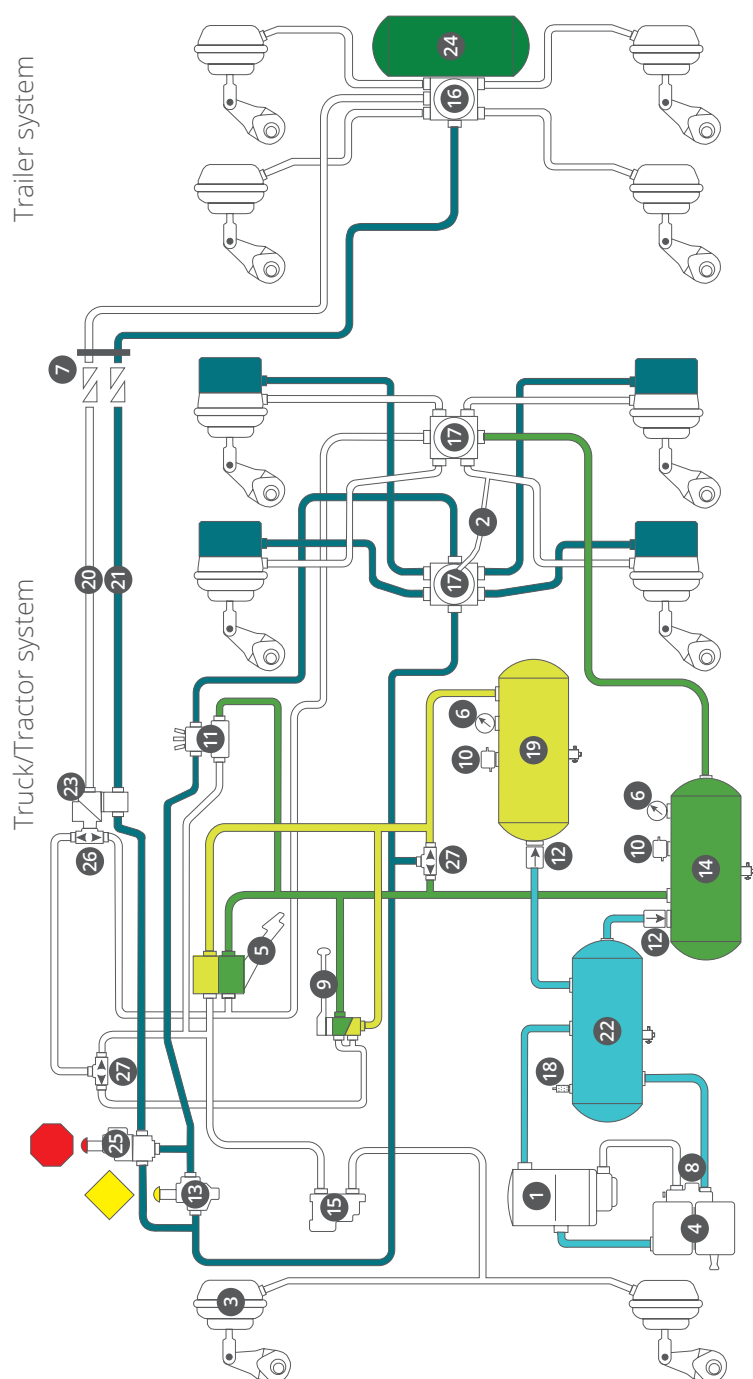


Figure 42. Typical tractor and trailer charged with air

Brake application – foot valve


Figure 43 illustrates air flow during a brake application made with the foot valve. Application air has applied the tractor and trailer brakes together. As previously explained, the two-way check valve has shifted and application air is being directed through the tractor protection valve to the service line.

Control pressure moves through the service line to act on the relay emergency valve. Control pressure causes the relay emergency valve to direct reservoir air from the trailer tank to the trailer-brake chambers. Trailer-brake application pressure is the same as control pressure, which is the pressure of application air by the foot valve. In this system, brake lag is minimized.

Release of the foot valve stops the flow of application air. The relay portions of the valves return to their original positions, stopping the flow of air pressure. The exhaust ports of the valves exhaust air pressure from the brake chambers, releasing the brakes.

In this system, the brakes of both units can be released quickly.

Legend

- | | |
|---|---|
|  Supply circuit |  12 One-way check valve |
|  Primary circuit |  13 Parking brake |
|  Secondary circuit |  14 Primary reservoir |
|  Spring-brake and trailer supply circuit |  15 Ratio valve |
|  Trailer reservoir circuit |  16 Relay emergency valve |
|  1 Air Dryer |  17 Relay valve |
|  2 Anti-compound line |  18 Safety valve |
|  3 Brake chambers |  19 Secondary reservoir |
|  4 Compressor |  20 Service line |
|  5 Foot valve |  21 Supply line |
|  6 Gauge |  22 Supply reservoir |
|  7 Gladhands |  23 Tractor protection valve |
|  8 Governor |  24 Trailer reservoir |
|  9 Hand valve |  25 Trailer supply valve |
|  10 Low pressure switch |  26 Two-way check stoplight switch |
|  11 Modulator valve |  27 Two-way check valve |





























Brake application – hand valve

You can use the hand valve to apply the trailer brakes. Air flow is illustrated in Figure 44. The tractor-protection valve and relay emergency valve are operated by application air, as explained in the foot-valve application.

Closing the hand valve releases the brakes by closing off application air. Air pressure in the chambers and lines will exhaust, also as explained in the previous foot-valve application.

Caution: Trailer brakes must not be used to hold a parked vehicle that is left unattended. Loss of pressure may result in loss of brakes! Always set the parking brake.

Legend

- | | |
|--|--|
|  Supply circuit |  One-way check valve |
|  Primary circuit |  Parking brake |
|  Secondary circuit |  Primary reservoir |
|  Spring-brake and trailer supply circuit |  Ratio valve |
|  Trailer reservoir circuit |  Relay emergency valve |
|  1 Air Dryer |  Relay valve |
|  2 Anti-compound line |  Safety valve |
|  3 Brake chambers |  Secondary reservoir |
|  4 Compressor |  Service line |
|  5 Foot valve |  Supply line |
|  6 Gauge |  Supply reservoir |
|  7 Gladhands |  Tractor protection valve |
|  8 Governor |  Trailer reservoir |
|  9 Hand valve |  Trailer supply valve |
|  10 Low pressure switch |  Two-way check stoplight switch |
|  11 Modulator valve |  Two-way check valve |

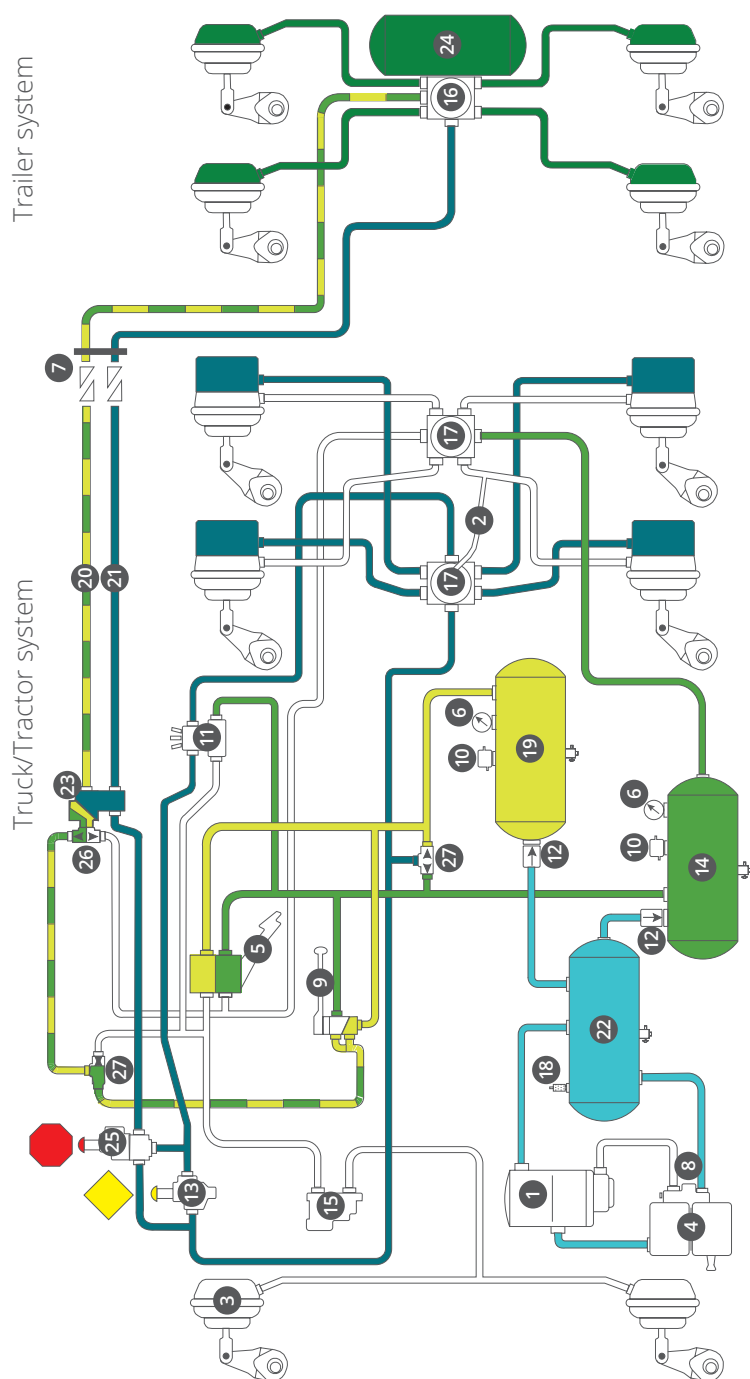


Figure 44. Tractor and trailer with trailer hand-valve application

Emergency applications






A trailer breakaway (Fig. 45) would result in a separation of the service line and supply line. Sudden loss of air pressure in the supply line triggers the relay emergency valve, which causes the trailer reservoir to deliver its air directly to the trailer brake chambers. This places the trailer brakes into emergency application.

Loss of pressure in the supply line also causes the trailer-supply valve to automatically shift to the closed position.

The tractor brakes are operable, without air loss, because the tractor protection system has isolated the tractor.

The trailer brakes will remain applied until either the pressure in the trailer reservoir is drained off or the supply line is repaired and the system is recharged.

Legend

- | | |
|--|---|
|  Supply circuit |  One-way check valve |
|  Primary circuit |  Parking brake |
|  Secondary circuit |  Primary reservoir |
|  Spring-brake and trailer supply circuit |  Ratio valve |
|  Trailer reservoir circuit |  Relay emergency valve |
|  1 Air Dryer |  17 Relay valve |
|  2 Anti-compound line |  18 Safety valve |
|  3 Brake chambers |  19 Secondary reservoir |
|  4 Compressor |  20 Service line |
|  5 Foot valve |  21 Supply line |
|  6 Gauge |  22 Supply reservoir |
|  7 Gladhands |  23 Tractor protection valve |
|  8 Governor |  24 Trailer reservoir |
|  9 Hand valve |  25 Trailer supply valve |
|  10 Low pressure switch |  26 Two-way check stoplight switch |
|  11 Modulator valve |  27 Two-way check valve |

Truck/Tractor system

Trailer system

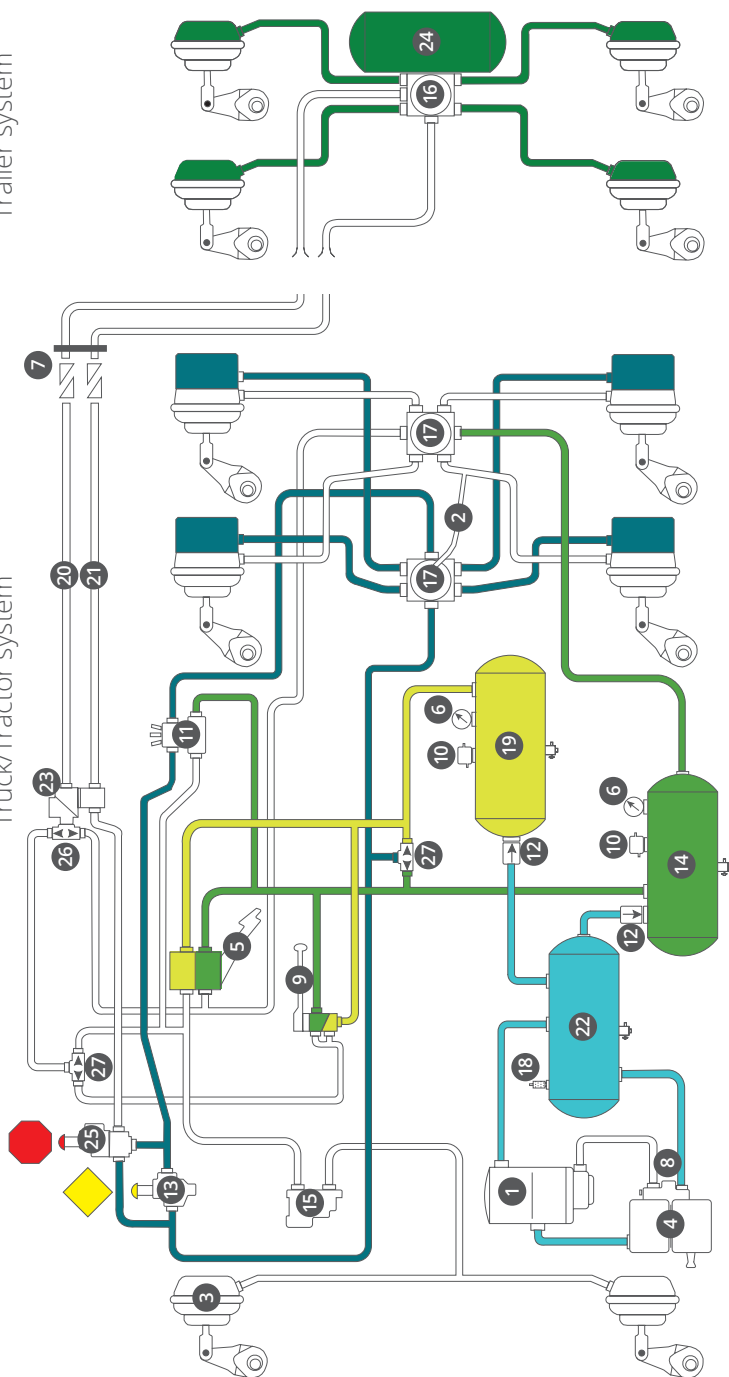


Figure 45. Tractor and trailer breakaway











Service-line rupture

If the service line is ruptured or disconnected, no action will take place until a brake application is made.

In Figure 46, the service line has ruptured and the driver has made a brake application with the foot valve.

Application air is directed to the control line through the tractor protection valve. Rupture of the service line will result in the escape of air pressure, if the brake application is held long enough to cause enough loss of pressure in the tractor system. This pressure drop causes the tractor protection system to close off, exhausting the supply line to the trailer. This will cause the trailer brakes to go into an emergency application.

Legend

- | | |
|--|---|
|  Supply circuit |  12 One-way check valve |
|  Primary circuit |  13 Parking brake |
|  Secondary circuit |  14 Primary reservoir |
|  Spring-brake and trailer supply circuit |  15 Ratio valve |
|  Trailer reservoir circuit |  16 Relay emergency valve |
|  1 Air Dryer |  17 Relay valve |
|  2 Anti-compound line |  18 Safety valve |
|  3 Brake chambers |  19 Secondary reservoir |
|  4 Compressor |  20 Service line |
|  5 Foot valve |  21 Supply line |
|  6 Gauge |  22 Supply reservoir |
|  7 Gladhands |  23 Tractor protection valve |
|  8 Governor |  24 Trailer reservoir |
|  9 Hand valve |  25 Trailer supply valve |
|  10 Low pressure switch |  26 Two-way check stoplight switch |
|  11 Modulator valve |  27 Two-way check valve |

Supply-line rupture

Rupture of the supply line (or an uncoupling of the supply line gladhands – Fig. 47) results in a pressure drop in the supply line between the trailer-supply valve and relay emergency valve. This triggers the emergency action of the relay emergency valve, placing the trailer brakes into emergency application. As in the previous examples, the trailer-supply valve will shift to the closed position.

Operation of the tractor brakes will not be affected if the tractor protection system is in working condition.

The relay emergency valve must be of the no-bleed-back type, so no air is lost from the trailer.

Note: Depending on the type of tractor protection system used, air loss from the tractor will stop immediately or it will bleed down to a minimum of 20 psi (138 kPa) and then shut off. Most newer units will shut off much higher than 20 psi.

Legend

- | | |
|--|--|
|  Supply circuit |  One-way check valve |
|  Primary circuit |  Parking brake |
|  Secondary circuit |  Primary reservoir |
|  Spring-brake and trailer supply circuit |  Ratio valve |
|  Trailer reservoir circuit |  Relay emergency valve |
|  Air Dryer |  Relay valve |
|  Anti-compound line |  Safety valve |
|  Brake chambers |  Secondary reservoir |
|  Compressor |  Service line |
|  Foot valve |  Supply line |
|  Gauge |  Supply reservoir |
|  Gladhands |  Tractor protection valve |
|  Governor |  Trailer reservoir |
|  Hand valve |  Trailer supply valve |
|  Low pressure switch |  Two-way check stoplight switch |
|  Modulator valve |  Two-way check valve |

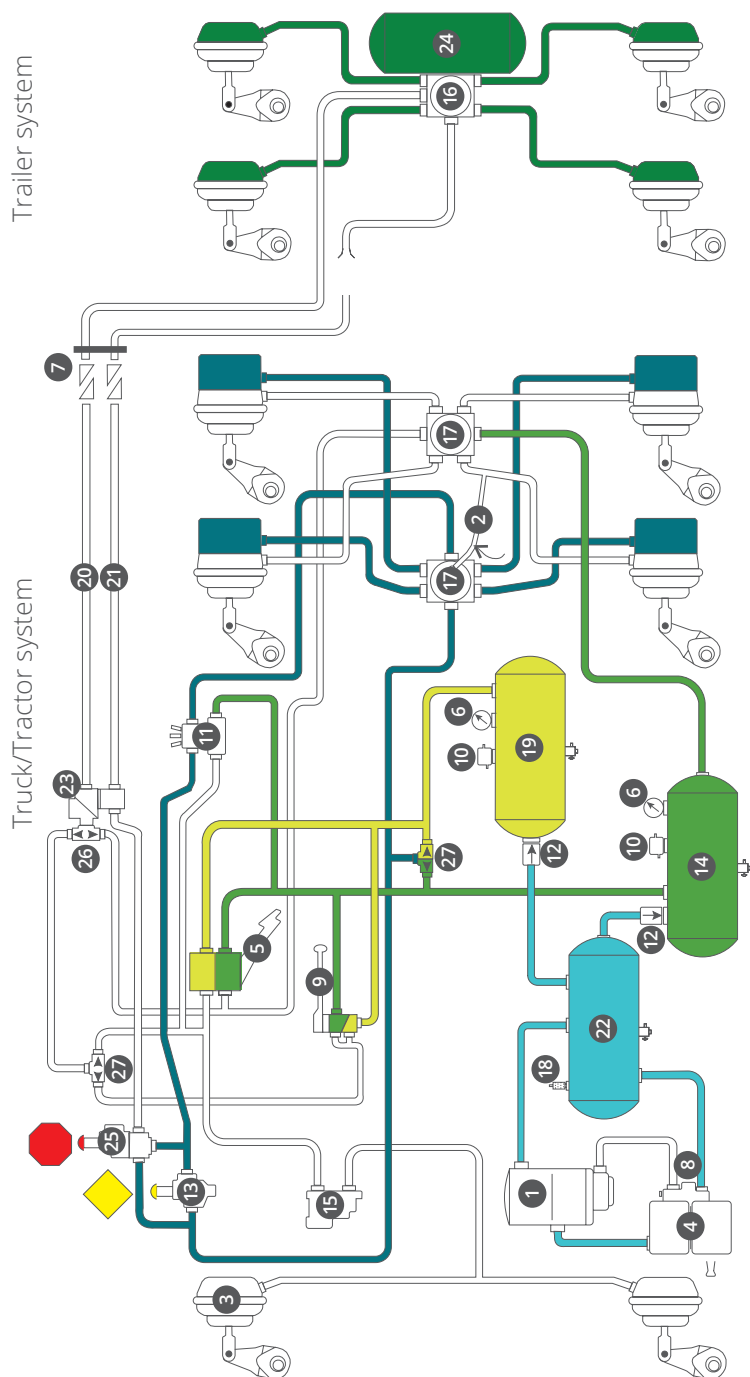


Figure 47. Tractor and trailer with supply-line rupture

Loss of supply reservoir air

Rupture of the compressor discharge line results in loss of pressure from the supply reservoir. In Figure 48, the one-way check valves have prevented primary and secondary reservoir air from escaping back to the supply reservoir and the ruptured line.

There is sufficient reserve air pressure in the primary and secondary reservoirs for a limited number of brake applications to stop the vehicle before the parking brakes are activated.

Legend

- | | |
|--|--|
|  Supply circuit |  One-way check valve |
|  Primary circuit |  Parking brake |
|  Secondary circuit |  Primary reservoir |
|  Spring-brake and trailer supply circuit |  Ratio valve |
|  Trailer reservoir circuit |  Relay emergency valve |
|  1 Air Dryer |  Relay valve |
|  2 Anti-compound line |  Safety valve |
|  3 Brake chambers |  Secondary reservoir |
|  4 Compressor |  Service line |
|  5 Foot valve |  Supply line |
|  6 Gauge |  Supply reservoir |
|  7 Gladhands |  Tractor protection valve |
|  8 Governor |  Trailer reservoir |
|  9 Hand valve |  Trailer supply valve |
|  10 Low pressure switch |  Two-way check stoplight switch |
|  11 Modulator valve |  Two-way check valve |

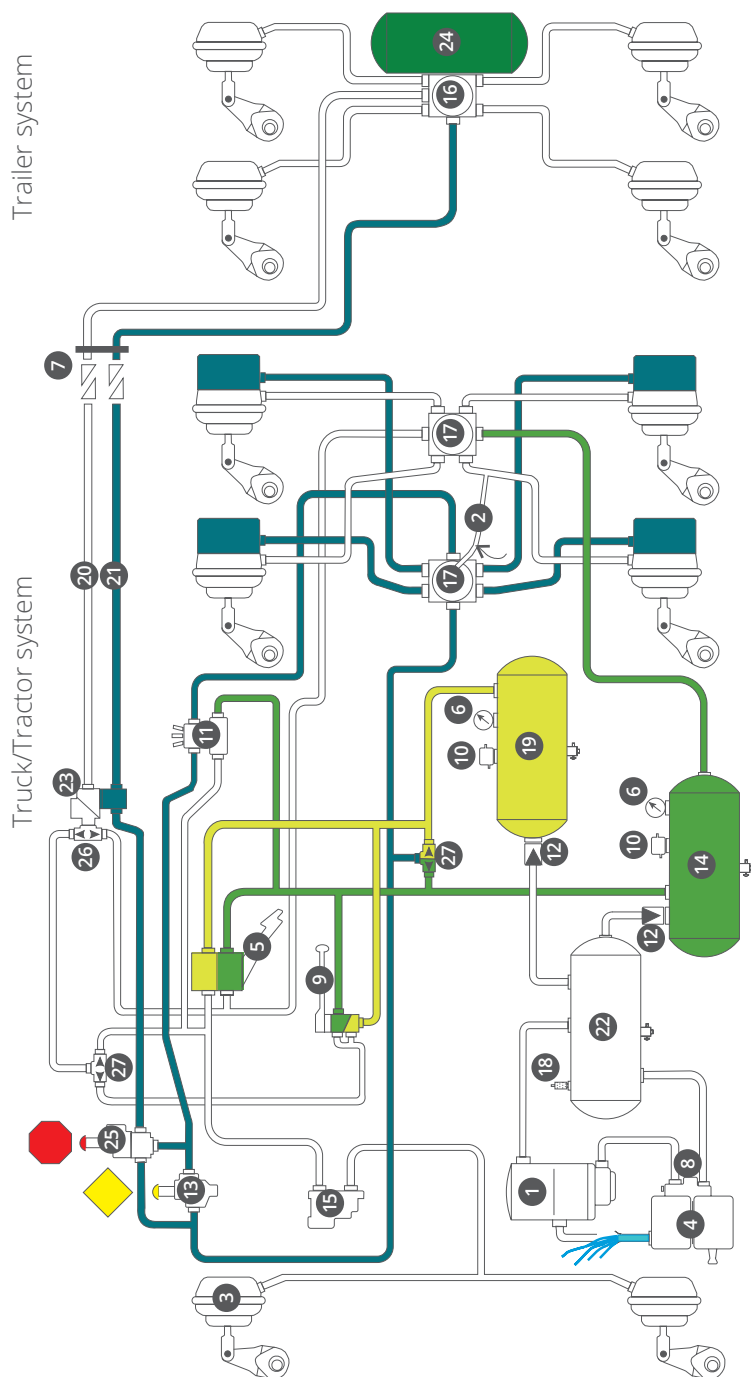


Figure 48. Tractor and trailer with loss of supply-reservoir pressure

Spring-brake trailer system

Components of the spring-brake trailer air system (Fig. 49) are:

- front-service reservoir
- rear-service reservoir
- trailer spring-brake valve
- relay valve (same as on tractor – not an emergency relay valve as used on trailers)
- spring-brake chambers

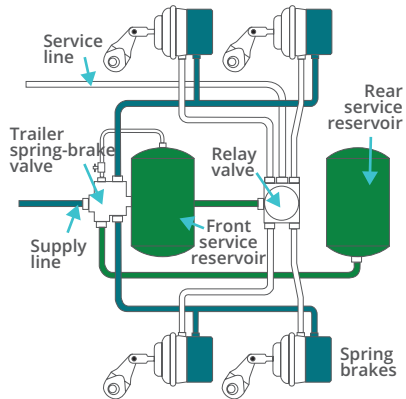


Figure 49. Trailer equipped with spring brakes

The new component – the trailer spring-brake valve (Fig. 50) – is responsible for several important functions:

- It controls application and release of the trailer's spring brakes.
- It protects and isolates the front-service reservoir from the rear-service reservoir. This is an important feature that prevents an automatic application of the spring-brakes, even though the trailer's service reservoir is lost.
- It prevents automatic spring-brake application if the trailer's supply line has a gradual leak.
- It will automatically apply the spring brakes if supply pressure is rapidly lost (after a breakaway).

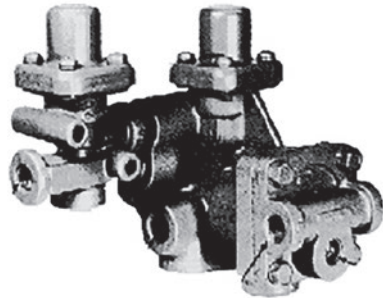


Figure 50. Trailer spring-brake valve

You can check the operation of the trailer spring-brake valve by closing the supply valve on the tractor or by disconnecting the supply line between the tractor and trailer with the supply valve in the open position.

Section summary

1. What is the purpose of a two-way check valve?
2. Why should the gladhands be protected when not in use?
3. How do you control the trailer brakes independently?
4. What are two ways of testing the emergency application of the trailer brakes?
5. Should the hand valve of a tractor trailer unit be used for parking? Why?
6. What is the main purpose of the tractor protection valve?
7. What is the main purpose of the trailer supply valve?
8. Name three functions of the relay emergency valve.
9. Describe the function of the supply line.
10. Describe the function of the service line.
11. What will occur if the supply line ruptures?
12. What will occur if the service line ruptures?
13. What will occur if a brake application is made with a ruptured service line?
14. If the foot valve and the hand valve are operated at the same time, can the application pressure be greater to the trailer brakes than the truck brakes?

Answer key on page 72

7. Checking and adjusting cam-type brakes

Within an inch of your life

The most common cause of brake failure is poor brake adjustment.

The popular type 30 air chamber has 2 1/2 in. (63.5 mm) of available stroke.

A correctly adjusted brake has only 1/2 in. (12.7 mm) of slack, leaving 2 in.

(50.8 mm) of reserve chamber stroke. When slack reaches 1 in. (25.4 mm)

the brakes **must** be adjusted. **This is the most important inch of your life.**

Here's why:

- At an 80 psi application, a brake chamber with 1 in. of slack (25.4 mm) strokes 1 3/4 in. (44.5 mm) because of component stretch. This reduces reserve chamber stroke to 3/4 in. (19.1 mm).
- Cast iron expands when heated. On a hot brake drum, this can cause the push rod to stroke a further 1/2 in. (12.7 mm), reducing reserve stroke to 1/4 in. (6.4 mm).
- Brake lining wears rapidly at high temperatures. If the lining wears down just the thickness of three sheets of paper, the push rod strokes a further 1/4 in. (6.4 mm). This could cause the chamber to bottom out and your brakes to fail.
- Even with cold drums, a vehicle with poorly adjusted brakes will have up to a 75% longer stopping distance than normal (Table 1).

Caution: Under normal light braking conditions even grossly maladjusted brakes seem to respond satisfactorily. It is only under moderate to heavy braking that this **dangerous** condition will become apparent.

Vehicle: 6 x 4 truck Weight: 55,000 lb. Speed: 60 mph			
Brake lining temperature	Average stopping distance (feet)		Increase
	Fully-adjusted brakes	Backed-off to limit	
150°F	342 ft	458 ft	34%
200°F	351 ft	519 ft	48%
300°F	366 ft	625 ft	71%
400°F	393 ft	692 ft	76%

Table 1. Lining temperature and stopping distance

Checking

Pull the chamber push rod out to its limit by pulling on the slack adjuster arm by prying with a short bar. If push rod travel is more than 1 in. (12.7 mm), brakes **must** be adjusted.

Brake stroke limits for clamp-type brake chambers		
Chamber Type (size)	Stroke Limit (mm)	Stroke Limit (in.) +/- 1/32 in.
6	32 mm	1¼ in.
9	35 mm	13/8 in.
12	35 mm	13/8 in.
12 LS	44 mm	1¾ in.
16	44 mm	1¾ in.
16 LS	51 mm	2 in.
20	44 mm	1¾ in.
20 LS	51 mm	2 in.
24	44 mm	1¾ in.
24 LS	51 mm	2 in.
30	51 mm	2 in.
30 LS	64 mm	2½ in.
30 DD3	57 mm	2¼ in.
36	57 mm	2¼ in.

Note: measurement tolerance is +/- 1 mm

Brake adjustment

Slack adjusters

Slack adjusters are mechanical links between the brake-chamber push rod and the camshaft on cam type brakes.

Slack adjusters are used to manually (Fig. 51) or automatically (Fig. 53) maintain proper brake chamber stroke and lining-to-drum clearance during normal operation.

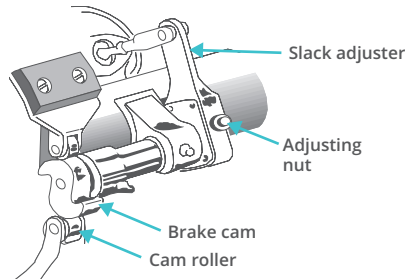


Figure 51. Manual slack adjuster

Slack adjusters are available in a variety of arm configurations, lengths, torque ratings and spline types.

The entire slack adjuster operates as a unit, rotating with the brake camshaft as brakes are applied or released. **The most efficient braking occurs when push rod travel is held to a minimum**, therefore it is important that brake adjustments are made often.

Automatic or self-adjusting slack adjusters

Automatic slack adjusters are designed to continuously and automatically maintain the brakes in proper adjustment during normal use. However, they must be checked daily to ensure they are maintaining proper push rod travel – less than one in. (25.4 mm) when manually pulled and less than two in. (50.8 mm) when the brake is applied. Normally two to four brake applications of 100 psi (689 kPa) per day will keep the brakes properly adjusted. If they are badly out of adjustment it may take up to 12 brake applications of 100 psi (690 kPa) to adjust them. If they are still out of adjustment a qualified person should repair them. Do not try to adjust them yourself unless you have been trained by a mechanic or trainer who is familiar with setting up and backing off this type of automatic slack adjuster.

Caution: Automatic slack adjusters *must be checked daily*.

Manual slack adjuster check – preferred method

With service brakes in the released position, mark the push rod even with the brake chamber. Make a full brake application and mark the push rod again. Measure between the two marks to determine the length of push-rod travel (stroke).

Compare the actual stroke to the recommended maximum stroke of 1 1/2 in. (38 mm) to determine if brake adjustment is necessary.

Brake adjustment

Regardless of chamber size or slack adjuster arm length, adjust the slack mechanism so there is 1/2 in. (12.7 mm) to 3/4 in. (19 mm) of push rod travel when **manually** (by hand) extended to place the shoes in contact with the drum.

After adjustment, check for brake contact by gently striking the brake drum with a metal hammer. When the brake shoes are away from the drum, a ringing sound will be heard. A dull sound indicates brake drag and that re-adjustment is required until drag is eliminated.

Check push rod travel after adjustment.

Note: If the brakes can't be adjusted by either of these two methods, inspect the foundation assembly for worn or broken components.

Service tests

- Apply the brakes and check that the slack adjusters rotate freely without binding.
- Release the brakes and check that the slack adjusters return to their released position without binding.
- With brakes released, check that the angle formed by the slack adjuster arm and push rod is greater than 90° (Fig. 52). All slack adjusters should be adjusted to this same angle.
- With brakes applied (20 psi [138 kPa]), check that the new angle is no less than 90° and that all slack adjusters have the same amount of travel.

Note: The practical test will include proper adjustment of a manual slack adjuster and a verbal explanation of the proper procedure for adjusting an automatic slack adjuster

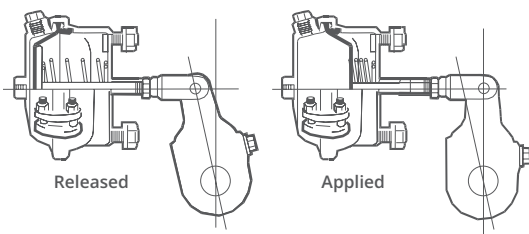


Figure 52. Slack adjuster and push rod angle

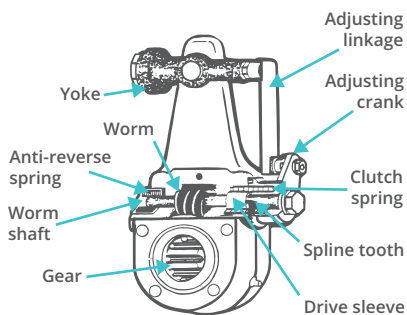


Figure 53. Automatic slack adjuster

Stroke vs. force

The amount of force available at the push rod is consistent out to two in. (50.8 mm) of stroke. After two in. (50.8 mm), push rod force drops very quickly (Fig. 54).

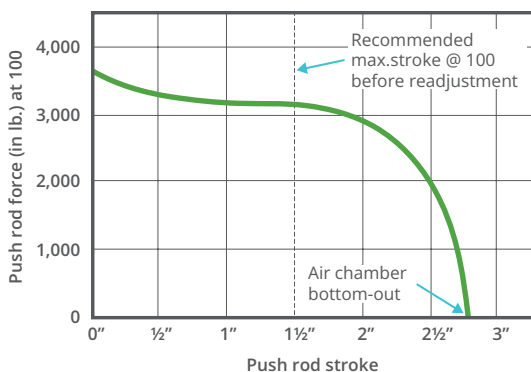


Figure 54. Push rod stroke and force

Caution: Don't be fooled – check the slack

It's up to *YOU*, the professional driver, to ensure that your vehicle has safe, properly adjusted brakes.

Steep downgrade

In some provinces, signs are posted in advance of steep or long downgrades:

These signs indicate that you must stop the vehicle in the pull-out area and inspect the vehicle's braking system before proceeding. Check:

1. Compressor is maintaining full reservoir pressure.
2. Push rod travel is within limitations on all chambers.
3. No audible air leaks.
4. Gladhands and lines are secure.
5. Drums, bearings and tires are at normal operating temperature.

You must be aware of the condition of the vehicle's braking system at all times. You should be able to notice any defects developing in the braking system and be aware that service or adjustments are required.

The extent of the driver's responsibility to make repairs will depend on factors such as the maintenance policy of the company and the driver's mechanical experience.



TRUCKS
STOP HERE
CHECK BRAKES
STEEP HILL AHEAD

The Pre-trip procedures included in this manual have been updated to reflect the minimum acceptable safety standards published in the 2014 National Safety Code (NSC) Standard 11B - Periodic Motor Vehicle Inspections and to provide information on the Commercial Vehicle Safety Alliance (CVSA) roadside out-of-service criteria. For more information, please visit the Canadian Council of Motor Transport Administrators (cmta.ca).

Pre-trip procedure for air single unit

Park the vehicle on level ground with the park brake set, the wheels blocked and the air tanks drained (if possible):

1. Check security and condition of compressor, belts and air lines under hood.
2. Start engine and let air pressure build up.
3. With wheels blocked, release park brakes.
4. Check brake adjustments (push rod travel) manually. Adjust if necessary.
5. Verbally explain the proper procedure for adjusting an automatic slack adjuster.
6. Governor operation (be sure spring brakes are released):
 - cut-out pressure between 120 and 145 psi (828 and 1,000 kPa)
 - cut-in pressure; fan brakes until compressor cuts in, usually about 20-25 psi (138 to 172 kPa) less than cut-out pressure, but at a minimum of 100 psi (690 kPa)
7. At maximum pressure:
 - ensure the park brake is released
 - shut off engine
8. Make and hold full foot-brake application:
 - maximum air loss after initial application must not exceed 1 psi in one minute
 - listen for audible air leaks

9. With ignition key on, fan brakes to lower air pressure:
 - low air warning system should operate at minimum 60 psi (414 kPa)
 - continue to fan brakes, truck park-brake valve may shut off although on some vehicles the button may never close. If the button does not pop out, walk to the rear of the tractor and check the brakes have applied – the slack adjuster and push rod should be at a 90° angle.
10. Run the engine between 600 and 800 rpm and observe the time needed for air pressure to rise from 85 to 100 psi (586 to 690 kPa). It should be less than two minutes.
11. Ensure park brakes are applied, remove wheel blocks.
12. Two final tests:
 - apply park brakes and gently try to pull ahead; release park brakes
 - move slowly ahead and make foot-brake application



Pre-trip procedure for air combination unit

Park the vehicle on level ground with the park brake set, the wheels blocked and the air tanks drained (if possible):

1. Check security and condition of compressor, belts and airlines under hood.
2. Start engine and let air pressure build up.
3. With wheels blocked, release park brakes.
4. Check brake adjustments (push rod travel) manually. Adjust if necessary.
5. Verbally explain the proper procedure for adjusting an automatic slack adjuster.
6. Governor operation (be sure spring brakes are released):
 - cut-out pressure between 120 and 145 psi (828 and 1,000 kPa)
 - cut-in pressure; fan brakes until compressor cuts in, usually about 20-25 psi (138 to 172 kPa) less than cut-out pressure, but at a minimum of 100 psi (690 kPa)
7. Charge trailer system and rebuild pressure. Release brakes and shut off engine.
8. Break service line (no air loss should occur).
9. Break supply line:
 - trailer brakes should apply immediately
 - there should be no air loss from trailer line
 - air from truck should shut off at a minimum pressure of 20 psi (138 kPa)
10. Make and hold a foot brake application:
 - check gauge for any air loss after initial application
 - listen for audible air leaks
 - there should be no air loss from the service line
11. Reconnect lines, charge trailer and rebuild pressure.
12. At maximum pressure:
 - release park brake
 - shut off engine

13. Make and hold full foot-brake application:
 - maximum air loss after initial application is four psi (28 kPa) in one minute
 - listen for audible air leaks
14. With ignition key on, fan brakes to lower air pressure:
 - low air warning system should operate at a minimum of 60 psi (414 kPa)
 - continue to fan brakes, trailer-supply valve should shut off air to trailer at a minimum of 20 psi (138 kPa)
 - truck park-brake valve may shut off although on some vehicles the button may never close. If the button does not pop out, walk to the rear of the tractor and check the brakes have applied – the slack adjuster and push rod should be at a 90° angle.
15. Run the engine between 600 and 800 rpm and observe the time needed for air pressure to rise from 85 to 100 psi (586 to 690 kPa) on the truck only. It should be less than two minutes.
16. Ensure park brakes are applied, remove wheel blocks.
17. Four final tests:
 - with trailer emergency brakes applied and truck park brakes released, try to **gently** pull ahead to test emergency application of trailer brakes
 - charge trailer, apply park brakes on the truck only and try to **gently** pull ahead
 - release park brakes, move slowly ahead and apply trailer brakes with hand valve, if equipped
 - move slowly ahead and make foot-brake application

Note: Repeat hand and foot-valve test on both sides of the unit checking for response and, in winter, for frozen wheels.

Caution: Build-up time procedure

Do not charge trailer. Begin timing when the primary needle on the dash gauge reaches 85 psi (586 kPa) and stop timing when the same needle reaches 100 psi (690 kPa).

Section summary

1. What is the maximum time permitted for the compressor to build from 85 to 100 psi (586 to 690 kPa)?
2. What is the maximum pressure loss permitted after the foot brake is fully applied with the engine shut off on a single unit? On a combination unit?
3. How can trailer-brake holding power be tested?
4. Should all drivers be able to adjust, unassisted, S-cam and drum braking systems equipped with manual slack adjusters?
5. What is the final brake test that should be made before the vehicle is put into service?
6. How much push rod travel is allowed before a brake adjustment must be made?

Answer key on page 74

One person alone is fully responsible to ensure that the braking system is in safe operating condition before the vehicle moves: THE DRIVER

8. Glossary

Air brakes	A braking system where the brakes are applied by air pressure.
Air over hydraulic brakes	A braking system where the brakes are applied hydraulically but application is made by air pressure.
Air dryer	A filter that removes most liquid and water vapour from the air before it reaches the reservoirs.
Air pressure gauge	A dash-mounted gauge telling the driver how much air pressure is in the primary and secondary reservoirs.
Application pressure gauge	A dash-mounted gauge which tells the driver the amount of air pressure being delivered when brakes are applied.
Blended air	Air taken from the primary and secondary circuits.
Brake fade	Loss of braking efficiency due to overheating the brakes.
Brake lag	The time required for air to flow through the system when brakes are applied.
Brake pads	Steel plates with lining which squeeze against the rotor (disc).
Brake pots	A term sometimes used to describe the brake chambers.
Brake drums	Large cast-iron drums located behind each wheel on vehicles equipped with drum brakes. The brake shoes are forced against them when the brakes are applied creating friction which stops the vehicle. Brake drums also dissipate heat.
Brake rotor	A steel disc located behind each wheel on vehicles equipped with disc brakes. The pads squeeze against it when the brakes are applied.
Brake shoes	Curved steel plates with an outer lining which press against the brake drums when the brakes are applied.
Breakaway	When the trailer becomes disconnected from the tractor.
Caging	The manual release of the spring brake chamber using the wind-off bolt.
Compounding	Making a service brake application when the parking brake is applied.
Compressor	A pump operated from the engine which builds and maintains air pressure.
Cut-in	The point at which the governor allows the compressor to resume pumping.
Cut-out	The point at which the pressure in the system has reached maximum capacity and the governor stops the compressor from pumping.
Diaphragm	A heavy rubber partition in the brake chamber which activates the brakes when air is forced against it.
Draincocks	Drain valves mounted on each reservoir so they can be drained of moisture and other contaminants.

Dynamiting	A slang term for an emergency application of the brakes due to sudden air loss.
Emergency line	A term sometimes used to describe the supply line.
Firewall	The metal panel between the cab and the engine compartment.
Foot valve	A foot operated valve used to apply the brakes.
Front axle ratio valve	A valve which reduces application pressure to the front brakes.
Fulcrum	The point or support on which a lever pivots.
Gladhands	The coupling devices used to connect the air lines from the tractor to the trailer.
Hand valve	A hand-operated valve which applies only the trailer brakes.
Loading	A term used to describe cut-in.
Low warning device	A light or buzzer which warns the driver of low air pressure.
Low warning switch	A switch which activates the low warning device.
Parking brake valve	A yellow diamond-shaped valve mounted on the dash which activates the parking brakes.
Piggyback	A term sometimes used to describe the spring brake chamber.
Pop-off valve	A term sometimes used to describe the safety valve.
Primary reservoir	A tank that normally supplies air to the brakes on the rear axle(s).
Quick release valve	A valve which exhausts air quickly to reduce release time.
Relay emergency valve	A valve located on or near the trailer reservoir on a trailer without spring brakes.
Relay valve	A valve which reduces brake lag.
Reservoirs	Tanks where the air is stored.
Safety valve	A valve mounted on the reservoir to prevent over-pressurization.
S-cam	A rotating S-shaped cam which activates the brake shoes.
Secondary reservoir	A tank that normally supplies air to the brakes on the steering axle.
Service brake chamber	A chamber which converts air pressure to mechanical force when the brakes are applied.
Service line	The rubber hose connecting the tractor and trailer. Air flows through it when the brakes are applied.
Slack adjusters	Devices used to manually or automatically keep the brakes in proper adjustment.
Spike	A term sometimes used to describe the hand valve.
Spring brake chamber	A chamber housing a large powerful spring which applies the brakes if there is an air loss or as a parking brake.

Supply line	The rubber hose connecting the tractor and trailer. Air flows through it when the trailer supply valve is opened. Sometimes called the emergency line.
Supply reservoir	The first tank where air is stored when it comes from the compressor. It supplies clean, dry air to the rest of the system.
Tractor protection system	A series of two valves which prevent air loss from the tractor if a trailer breaks away.
Trailer-supply valve	A red octagonal valve mounted on the dash which supplies air to the trailer.
Two-way check valve	A valve which ensures a steady supply of air in the event of an air loss in one system.
µm	A unit of measurement. $2.5\text{ }\mu\text{m} = 2.5/1000$ of a millimetre or the thickness of three sheets of paper.
Unloading	A term used to describe cut-out.
Wet tank	A term sometimes used to describe the supply reservoir.
Wind-off bolt	A device on the brake chamber used to manually release the spring brakes.

9. Air brake manual summary

1. Name the five basic components of an air brake system.

1. _____
2. _____
3. _____
4. _____
5. _____

2. The maximum air pressure available for a full brake application depends on?

1. _____

3. The most common cause of loss of braking effort on air brake-equipped vehicles is?

4. How often should the reservoirs be drained of moisture and sludge accumulation?

5. What must the driver do when a low-pressure warning buzzer sounds?

6. What is the minimum pressure at which the compressor should cut in?

_____ psi

7. If the safety valve on the reservoir blows, it would indicate what?

8. What is the purpose of a relay valve?

9. How are spring brakes held in the released position?

10. Spring brakes are most effective as a:

11. The function of the slack adjuster is:

12. Why should spring brakes be released before making a brake application?

13. Maximum reservoir pressure loss through leaks is:

- _____ psi in _____ minutes for combination units
- _____ psi in _____ minutes for single units

14. What factor determines how much heat can be absorbed by the brake drum?

15. What is the final check to be made by the driver before leaving the yard?

Answer key on page 74

10. Conversion charts

kiloPascals (kPa) to pounds per square inch (psi)

	psi									
kPa	0	1	2	3	4	5	6	7	8	9
—	—	0.15	0.29	0.44	0.58	0.73	0.87	1.02	1.16	1.30
10	1.45	1.59	1.74	1.89	2.03	2.16	2.32	2.47	2.61	2.76
20	2.90	3.05	3.19	3.34	3.48	3.63	3.77	3.92	4.06	4.21
30	4.35	4.50	4.64	4.78	4.93	5.08	5.22	5.37	5.51	5.66
40	5.80	5.95	6.09	6.24	6.38	6.53	6.67	6.82	6.96	7.11
50	7.25	7.40	7.54	7.69	7.83	7.98	8.12	8.27	8.41	8.56
60	8.70	8.85	8.99	9.14	9.18	9.43	9.57	9.72	9.86	10.01
70	10.15	10.30	10.44	10.59	10.73	10.88	11.02	11.17	11.31	11.46
80	11.60	11.75	11.89	12.04	12.18	12.33	12.47	12.62	12.76	12.91
90	13.05	13.20	13.34	13.49	13.63	13.78	13.92	14.07	14.21	14.36
100	14.50	14.65	14.79	14.94	15.08	15.23	15.37	15.52	15.66	15.81

Pounds per square inch (psi) to kiloPascals (kPa)

	kPa									
psi	0	1	2	3	4	5	6	7	8	9
—	—	6.89	13.79	20.68	27.58	34.47	41.37	48.27	55.16	62.05
10	68.95	75.84	82.74	89.63	98.53	103.42	110.32	117.21	124.11	131.00
20	137.90	144.79	151.68	158.58	165.47	172.37	179.26	186.16	193.05	199.95
30	206.84	213.74	220.63	227.53	234.42	241.32	248.21	255.11	262.00	268.90
40	275.79	282.69	289.58	296.47	303.37	310.26	317.16	324.05	330.95	337.84
50	344.74	351.63	358.53	365.42	372.32	379.21	386.11	393.00	399.90	406.79
60	412.69	420.58	427.47	434.37	441.26	448.16	455.05	461.95	468.84	475.74
70	482.63	489.53	496.42	503.32	510.21	517.11	524.00	530.90	537.79	544.69
80	551.58	558.48	565.37	572.26	579.16	586.05	592.95	599.84	606.74	613.63
90	620.53	627.42	634.32	641.21	648.11	655.00	661.90	668.80	675.69	682.58
100	689.48	696.37	703.27	710.16	717.05	723.95	730.84	737.74	744.63	751.53

11. Answer key

Section 2 summary

1. The final factor that moves a vehicle is the amount of traction its tires have on the road surface. (page 2)
2. The final factor that stops a vehicle is the traction between tires and road surface. (page 2)
3. Heat generated is dissipated through the brake drums. (page 2)
4. If one or two wheels had brakes that were not properly adjusted, the other wheels would have to do more than their share of the braking, and that might be more than their brakes were constructed to stand. Excessive use of the brakes would then result in a build-up of heat greater than the brake drums could absorb and dissipate. Too much heat would result in brake damage and possible failure. (page 3)
5. Friction is the force which resists movement between two surfaces in contact with each other. To stop a vehicle, brake shoe linings are forced against the machined surfaces of the brake drums, creating friction. This friction produces heat. (page 2)
6. If weight is doubled, stopping power must be doubled to stop in the same distance. (page 3)
7. If speed is doubled, stopping power must be increased four times to stop in the same distance. (page 3)
8. When weight and speed are both doubled, stopping power must be increased eight times to stop in the same distance. (page 3)
9. Air that is compressed into a much smaller space than it normally occupies. (page 4)
10. PSI stands for "Pounds per square inch". (page 5)
11. The total force exerted on the diaphragm would be 1,200 lbs. (40 x 30) (page 5)

12. **Reaction Time:** The time it takes from the moment a hazard is recognized to the time the brake pedal is applied, approximately 3/4 of a second to 1 1/2 seconds.

Brake Lag: The time air takes to travel through a properly maintained air brake system, about 4/10 of a second.

Braking Distance: The actual distance a vehicle travels after the brake is applied until the vehicle stops. This distance depends on the ability of the lining to produce friction, the brake drums to dissipate heat and the tires to grip the road.

Stopping Distance: Stopping distance consists of three factors: Driver's reaction time + Brake lag + Braking distance. (page 6)

Section 3 and 4 summary

1. An air pressure gauge is installed in the dash (plumbed in after the service reservoir) so you will know the amount of air pressure available for braking. (page 14)
2. If the low air warning system activates, you must stop and determine the cause. (page 16)
3. The purpose of a quick-release valve is to allow faster release of the brakes. (page 16)
4. The purpose of a relay valve is to provide faster application pressure to the brake chambers reducing lag time. (page 15)
5. The reservoir is protected from being over-pressurized by a safety valve. (page 14)
6. The low-pressure warning device activates when air pressure drops below 60psi (414 kPa). (page 16)
7. Brake lag to the rear wheels is minimized through a relay valve installed near the rear brake chambers. (page 15)

Section 5 summary

1. The basic principle is if there is an air loss in either circuit, the other circuit will continue to operate independently to prevent total brake failure. (page 19)
2. The valve used to protect the primary circuit from the secondary circuit is a two-way check valve. (page 28)
3. Yes. If there is an air loss in either circuit, the other circuit will continue to operate independently. Unless air is lost in both circuits, the vehicle will continue to have braking ability. (page 22)
4. Compounding the brakes happens when a service brake application is made with the park brake still applied. This can result in damaged brake components and possibly brake failure. (page 25)
5. Because they are held on by spring pressure and require no air. (page 28)
6. Parking brakes are held in the released position with air pressure of 70 psi or greater. (page 25)
7. To prevent compounding of the brakes. (page 25)
8. Parking-brakes are under extreme pressure, disassembling may result in serious injury. All discarded spring-brake chambers must be disassembled and disposed of by a trained professional. (page 24)
9. Two functions of the spring brakes are a service brake and emergency/parking brake. (page 24)
10. If a failure occurs in the primary circuit and a brake application is made, control air from the secondary side of the foot valve is directed to a spring-brake modulator. (page 28)
11. Blended air is taken from the primary and secondary circuits through a two-way check valve. (page 27)

Section 6 summary

1. The two-way check valve allows control of the trailer brake by use of the hand valve or foot valve. This valve will permit air to flow from the source that is supplying the higher application pressure. (page 34)
2. Gladhands should be protected to prevent water and dirt from entering the couplers and lines. (page 34)
3. The trailer brakes are controlled independently with the hand valve. (page 33)
4.
 1. Closing supply valve on the tractor.
 2. Disconnecting the supply line between the tractor and trailer with the supply valve in the open position. (page 31)
5. No, trailer brakes must not be used to hold a parked vehicle that is left unattended. Loss of pressure may result in loss of brakes. (page 32)
6. To prevent air loss from the tractor when not hooked to a trailer or if a trailer breaks away. (page 33)
7.
 1. It controls the tractor protection valve. The tractor protection valve will not operate if the trailer-supply valve is closed.
 2. It serves as a link between the tractor and the trailer parking-brake systems by supplying air to the trailer reservoirs, through the supply line. (page 31)
8.
 1. The relay part of the valve relays air from the trailer reservoir to the trailer-brake chambers during a brake application. This part of the valve operates like the relay valve previously discussed. It also provides a quick release of the trailer brakes.
 2. The emergency part of the valve directs trailer reservoir pressure to the trailer brakes causing an emergency application sometimes referred to as dynamiting. This action occurs automatically in the event of a ruptured or parted supply line between tractor and trailer, or loss of air from the main reservoir system. The driver may operate the cab-mounted trailer-supply valve to cause an emergency application of the trailer brakes.
 3. The relay emergency valve has a one-way check valve that stops air in the reservoir from going back to the source of the supply. The driver has opened the trailer-supply valve to allow main-reservoir air pressure to be directed through the tractor protection valve to

the trailer. Air pressure passes through the relay emergency valve to the trailer reservoir. Pressure builds up in the trailer reservoir to the same pressure as the main reservoirs on the tractor. This is known as charging the trailer system. The trailer-supply valve remains in the open position when pressure has built up to between 20 and 60 psi (138 and 413 kPa), depending on the make. (page 35)

9. The supply line (also called the emergency line) carries air to fill the trailers tanks. (page 32)
10. The service line carries air controlled by the foot brake or the hand brake. (page 33)
11. Rupture of the supply line (or an uncoupling of the supply line gladhands) results in a pressure drop in the supply line between the trailer-supply valve and relay emergency valve. This triggers the emergency action of the relay emergency valve, placing the trailer brakes into emergency application. (page 46)
12. If the service line is ruptured or disconnected, no action will take place until a brake application is made. (page 44)
13. Application air is directed to the control line through the tractor protection valve. Rupture of the service line will result in the escape of air pressure, if the brake application is held long enough to cause enough loss of pressure in the tractor system. This pressure drop causes the tractor protection system to close off, exhausting the supply line to the trailer. This will cause the trailer brakes to go into an emergency application. (page 44)
14. Yes. The two-way check valve allows control of the trailer brake by use of the hand valve or foot valve. This valve will permit air to flow from the source that is supplying the higher application pressure. Two-way check valves can permit a higher brake application to the trailer than the truck. (page 34)

Section 7 summary

1. Less than 2 minutes from 85 to 100 psi running the engine between 600 and 800 rpm. (page 59)
2. Single unit: maximum air loss after initial application must not exceed one psi in one minute. (page 58)
Combination unit: maximum air loss after initial application is four psi (28 kPa) in one minute. (page 61)
3. With trailer emergency brakes applied and truck park brakes released, try to gently pull ahead to test emergency application of trailer brakes. (page 61)
4. Yes. All drivers should be trained to make brake adjustments. The driver must be always aware of the condition of the vehicle's braking system. You should be able to notice any defects developing in the braking system and be aware that service or adjustments are required. The extent of the driver's responsibility to make repairs will depend on factors such as the maintenance policy of the company and the driver's mechanical experience. (page 57)
5. Move the vehicle slowly ahead and make foot-brake application. (page 59)
6. Manual slack adjuster: 1/2 in. (12.7 mm) to 3/4 in. (19 mm) of push rod travel when manually (by hand) extended to place the shoes in contact with the drum.
Automatic slack adjuster: Less than one inch (25.4 mm) when manually pulled and less than two inches (50.8 mm) when the brake is applied. (page 54)

Section 9 summary

1. 1. Compressor
2. Reservoirs
3. Foot Valve
4. Brake Chambers
5. Brake shoes and drums or brake rotors and pads (page 8)
2. The maximum air pressure available for brake applications depends on how much air is in the reservoir. A driver is not able to make a higher pressure brake application than there is air pressure in the reservoir. (page 9)

3. The most common cause of loss of braking is poor brake adjustment. (page 54)
4. The reservoirs still need to be drained daily when in use. (page 18)
5. A driver must stop the vehicle and determine the cause. (page 13)
6. 100 psi (page 14)
7. If a safety valve blows off excess pressure, this indicates a problem with the governor. (page 14)
8. The purpose of a relay valve is to provide faster application pressure to the brake chambers reducing lag time. (page 15)
9. Spring brakes are held in the released position with air pressure of 70 psi or greater. (page 28)
10. Parking brake. (page 24)
11. Slack adjusters are used to (manually or automatically) maintain proper brake chamber stroke and lining-to-drum clearance during normal operation. (page 54)
12. To avoid compounding of the brakes. (page 25)
13. 4 psi in 1 minute for combination units (page 61)
1 psi in 1 minute for single units (page 58)
14. Drum thickness determines the amount of heat that can be absorbed and dissipated. (page 11)
15. Move slowly ahead and make foot-brake application. (page 59)

[illegible]

[illegible]

[illegible]



sgi.sk.ca

SLB142 | 10/2025 | 5221

